1742

SERVICE DATA
FILE NO. 050-294
10-SYSTEM

TOSHIBA
COLOUR TELEVISION
2100RFT:2101RFZ

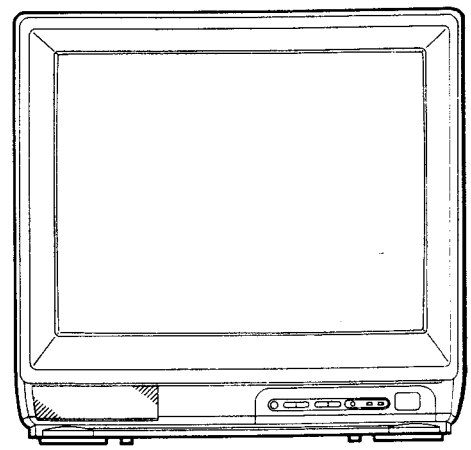

SPECIFICATIONS

Input Power Rating:	88 watts, AC 220 volts, 50 Hz
Aerial Input Impedance:	75 ohm unbalanced type for VHF and UHF
Receiving Channels:	SECAM-L Standard: VHF ..... channels B to C, 1 to 6, B to Q (70 to 86) UHF ..... channels 21 to 69 PAL B/G Standard, SECAM B/G Standard: VHF ..... channels 2 to 4, 5 to 12 and S3 to S20 UHF ..... channels 21 to 69 PAL I Standard: UHF ..... channels 21 to 68 PAL D/K, SECAM D/K Standard: VHF ..... channels 1 to 12 UHF ..... channels 21 to 69 PAL, SECAM 50 Hz / 60 Hz (For Video Disk playback) 4.43 NTSC (For VCR playback), NTSC (3.58 MHz) (Video mode only)
Intermediate Frequencies:	Picture I-F carrier frequency: B/G, D/K ..... 32.7 MHz (VH,U) 37.4 MHz (VL) L, I ..... 32.7 MHz Sound I-F carrier frequency: L ..... 39.2 MHz B/G ..... 38.2 MHz (VH,U) 31.9 MHz (VL) D/K ..... 39.2 MHz (VH,U) 30.9 MHz (VL) I ..... 38.7 MHz
Picture Tube:	21 inches, A51EBV12X01, 510 mm (measured on diagonal of viewable picture area), 90° deflection
Sound Output:	10.0 watts (at 10% harmonic distortion) x 2, Max. 15 watts x 2
Speakers:	100 mm round 2 pcs, 40 mm round 2 pcs
Aux. Terminals:	Headphone Jack, 21 pin socket, S-VIDEO/AUDIO socket, A/V INPUT socket
Dimensions:	Height ..... 482 mm Width ..... 511 mm Depth ..... 485 mm
Weight:	20.5 kg

Specifications are subject to change without notice.

Printed in Japan Mar 1990 (So)

1742

SAFETY INSTRUCTIONS

WARNING: BEFORE SERVICING THIS CHASSIS, READ THE "X-RAY RADIATION PRECAUTION", "SAFETY PRECAUTION" AND "PRODUCT SAFETY NOTICE" INSTRUCTIONS BELOW.

X-RAY RADIATION PRECAUTION

1. The E.H.T. must be checked every time the receiver is serviced to ensure that the C.R.T. does not emit X-ray radiation as result of excessive E.H.T. voltage. The nominal E.H.T. for this receiver is 27.5 kV at zero beam current (minimum brightness) operating at 220V a.c. The maximum E.H.T. voltage permissible in any operating circumstances must not exceed 29.0 kV. When checking the E.H.T., use the 'High Voltage Check' procedure in this manual using an accurate E.H.T. voltmeter.
2. The only source of X-RAY radiation in this receiver is the C.R.T. To prevent X-ray radiation, the replacement C.R.T. must be identical to the original fitted as specified in the Parts List.
3. Some components used in this receiver have safety related characteristics preventing the C.R.T. from emitting X-ray radiation.
   For continued safety, replacement component should only be made after referring the Product Safety Notice below.

SAFETY PRECAUTION

1. This receiver has a nominal working E.H.T. voltage of 25.0 kV. Extreme caution should be exercised when working on the receiver with the back removed.
   Do not attempt to service this receiver if you are not conversant with the precautions and procedures for working on high voltage equipment.
   When handling or working on the C.R.T., always discharge the anode to the receiver chassis before removing the anode cap
   The C.R.T., if broken, will violently expel glass fragments. Use shatter proof goggles and take extreme care while handling.
   Do not hold the C.R.T. by the neck as this is a very dangerous practice.
2. It is essential that to maintain the safety of the customer all cable forms be replaced exactly as supplied from factory.
3. A small part of the chassis used in this receiver is, when operating, at approximately half mains potential at all times. It is therefore essential in the interest of safety that when serving or connecting any test equipment the receiver should be supplied via a suitable isolating transformer of adequate rating.
4. Replace blown fuses within the receiver with the fuse specified in the parts list.
5. When replacing wires or components to terminals or tags, wind the leads around the terminal before soldering. When replacing safety components identified by the international hazard symbols on the circuit diagram and parts list, it must be a Toshiba approved type and must be mounted as the original.
6. Keep wires away from high temperature components.

PRODUCT SAFETY NOTICE

Many electrical and mechanical components in this chassis have special safety-related characteristics. These characteristics are often passed unnoticed by a visual inspection and the X-ray radiation protection afforded by them cannot necessarily be obtained by using replacements rated at higher voltages or wattage, etc.Components which have these special safety characteristics in this manual and its supplements are identified by the international hazard symbols on the schematic diagram and parts list. Before replacing any of these components read the parts list in this manual carefully. Substitute replacement components which do not have the same safety characteristics as specified in the parts list may create X-ray radiation.

FRONT CONTROLS AND REAR VIEWS

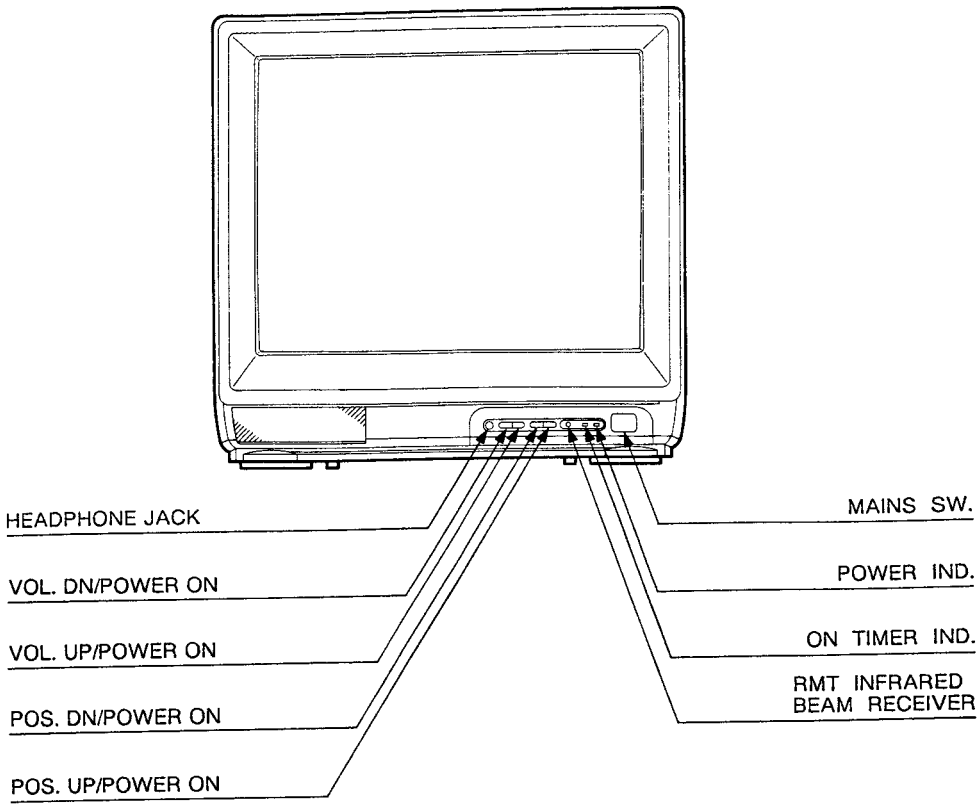

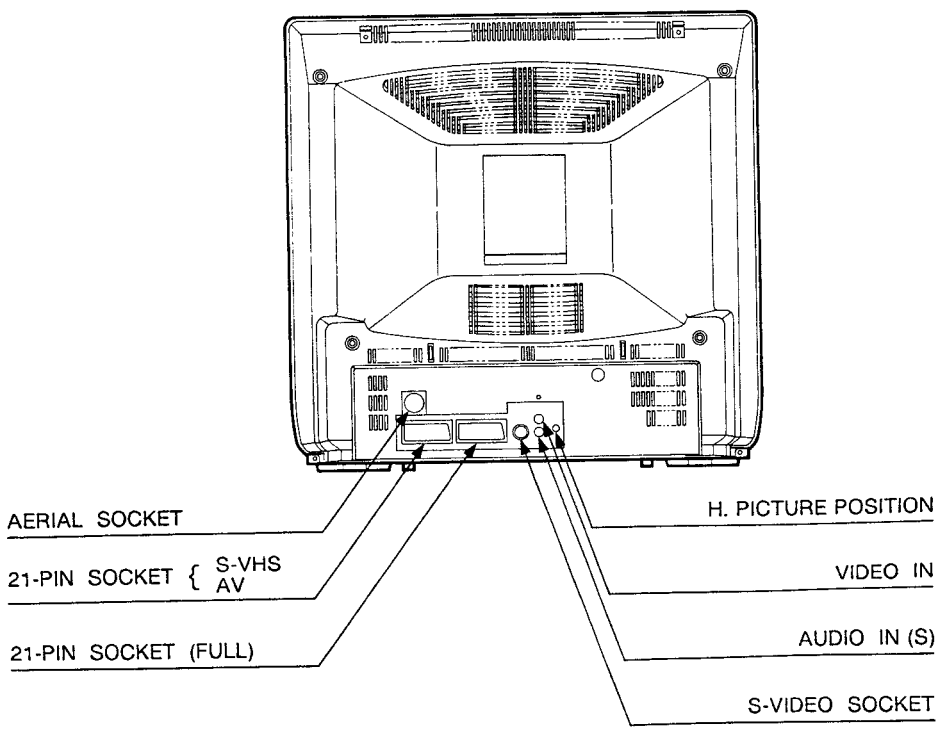

REMOTE HAND HELD UNIT

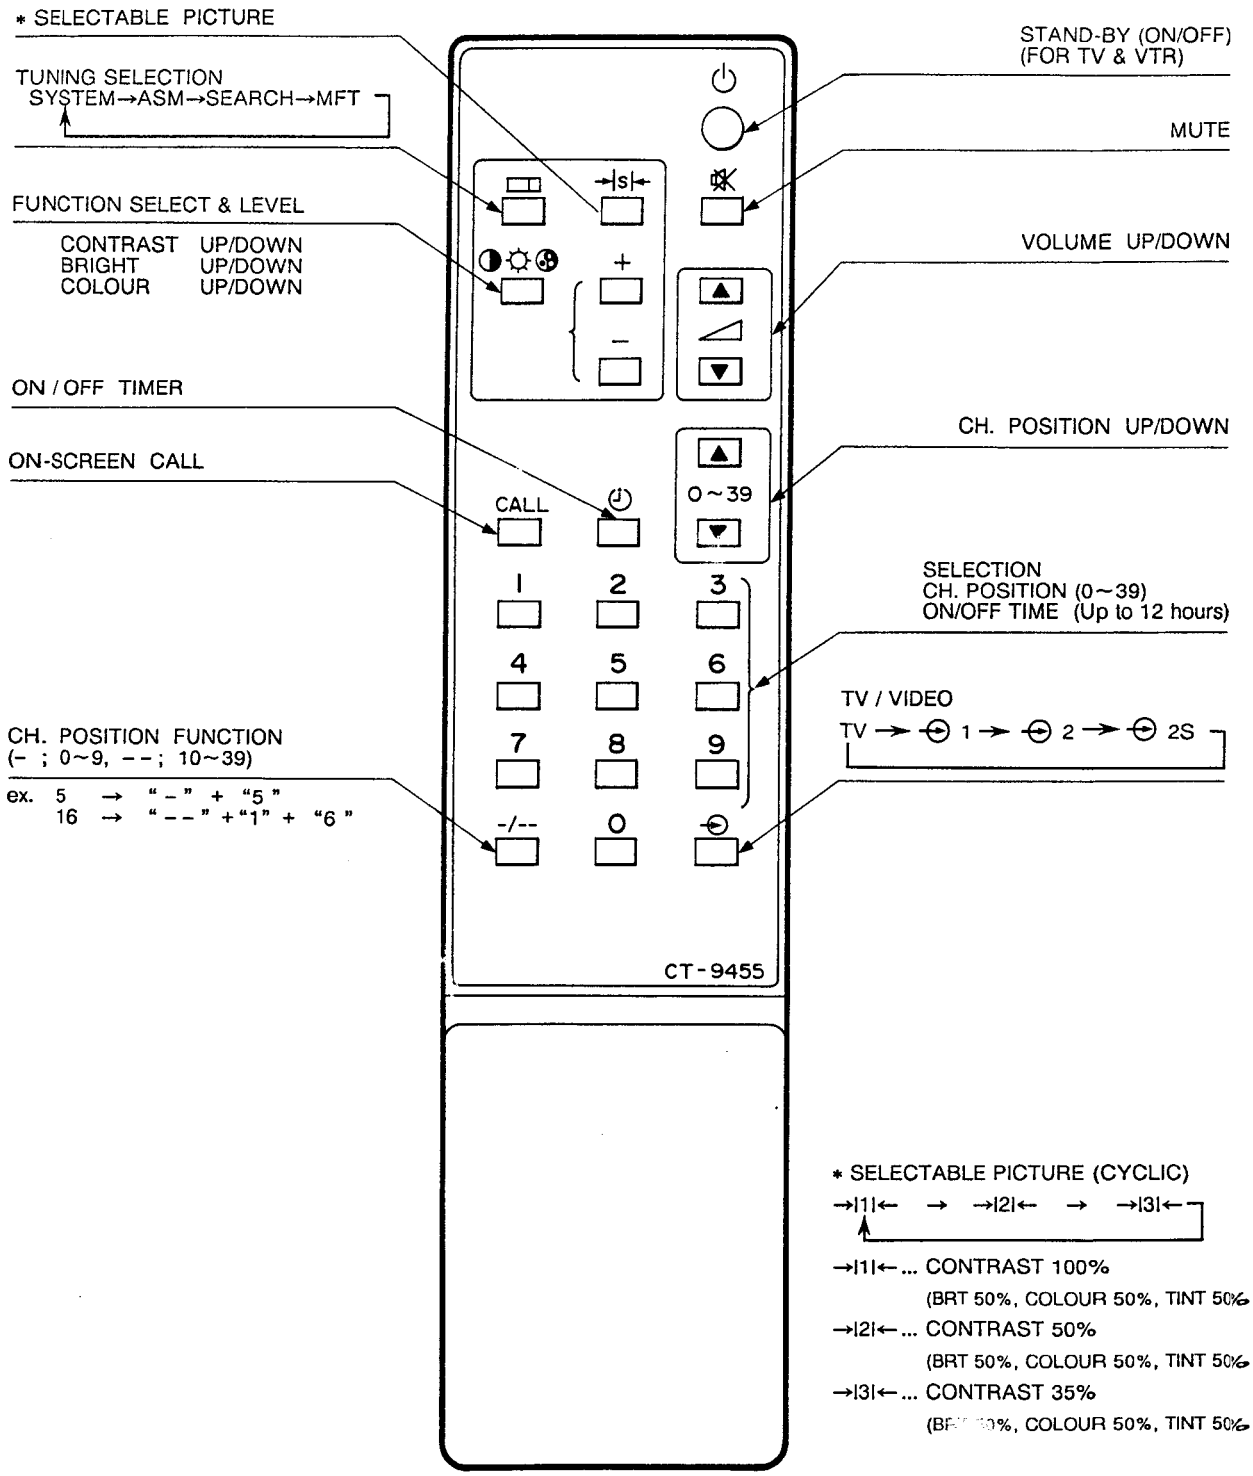

WARNING: BEFORE SERVICING THIS CHASSIS, READ THE "X-RAY RADIATION PRECAUTION", "SAFETY PRECAUTION" AND "PRODUCT SAFETY NOTICE" ON PAGE 2 OF THIS MANUAL.

INSTALLATION AND SERVICE ADJUSTMENTS

GENERAL INFORMATIONS

All adjustments are thoroughly checked and corrected when the receiver leaves the factory. Therefore the receiver should operate normally and produce proper colour and B/W pictures upon installation. However, several minor adjustments may be required depending on the particular location in which the receiver is operated.

This receiver is shipped completely in cardboard carton. Carefully draw out the receiver from the carton and remove all packing materials.

Plug the power cord into a convenient 220 volts 50 Hz AC two pin power outlet. Turn the receiver ON. Check and adjust all the customer controls such as BRIGHTNESS, CONTRAST and COLOUR Controls to obtain natural colour or B/W picture.

AUTOMATIC DEGAUSSING

A degaussing coil is mounted around the picture tube so that external degaussing after moving the receiver is normally unnecessary, providing the receiver is properly degaussed upon installation. The degaussing coil operates for about 1 second after the power to the receiver is switched ON. If the set is moved or faced in a different direction, the power switch must be switched off at least one hour in order that the automatic degaussing circuit operates properly. Should the chassis or parts of the cabinet become magnetized to cause poor colour purity, use an external degaussing coil. Slowly move the degaussing coil around the faceplate of the picture tube, the sides and front of the receiver and slowly withdraw the coil to a distance of about 2 m before disconnecting it from AC source. If colour shading still persists, perform the COLOUR PURITY ADJUSTMENT and CONVERGENCE ADJUSTMENTS procedures.

+120 VOLT POWER SUPPLY ADJUSTMENT (R851)

CAUTION: +B voltage closely relates to the high voltage. To prevent hazardous X-RAY RADIATION, the +B voltage must be properly adjusted to +120 volts.

1. Tune in an active channel. Adjust the BRIGHTNESS and CONTRAST Controls for normal picture.
2. Check that the AC power Line voltage is normal. (AC 220 volts, 50 Hz)
3. Connect a digital voltmeter to both leads of C451.
4. Adjust R851 for 120V reading on the meter.
5. Remove the digital voltmeter.

HIGH VOLTAGE CHECK

CAUTION: There is no HIGH VOLTAGE ADJUSTMENT on this chassis.

1. Connect an accurate high voltage meter to the second anode of the picture tube.
2. Turn on the receiver. Set the BRIGHTNESS and CONTRAST Controls to minimum (zero beam current).
3. High voltage will be measured below 29.0 kV.
4. Rotate the BRIGHTNESS Control to both extremes to be sure the high voltage does not exceed the limit of 29.0 kV under any conditions.

HEIGHT ADJUSTMENT

1. Receive the WG PHILIPS pattern, and set the contrast and colour to minimum, and the brightness to centre.
2. Change the VERT POSITION SW (S301) so the round shape in the pattern is located in the centre of screen.
3. HEIGHT Control (R351) changes the size of the picture or pattern, having an equal effect on the top and bottom. Make final adjustment to overscan the mask 2 cm at top and bottom.

HORIZONTAL CENTRE ADJUSTMENT

1. Receive the WG PHILIPS pattern.
2. Set the contrast and colour to minimum, and the bringhtness to centre.
3. Adjust H. CENTRE USER Control (R452) to the click (centre) position.
4. Adjust H. CENTRE SUB Control (R451) so the pattern centre can be located at the screen centre.

FOCUS ADJUSTMENT

Adjust FOCUS Control on FLYBACK TRANS.(T461) for well defined scanning lines in the centre area of the screen.

BELL COIL (LM01) ADJUSTMENT

1. Receive SECAM colour bar signal.
2. Connect the synchroscope to the terminal p[illegible] of LM01.
3. Adjust LM01 for the flat level of amplitude [illegible]n colour bar waveform on the scope. (See figure

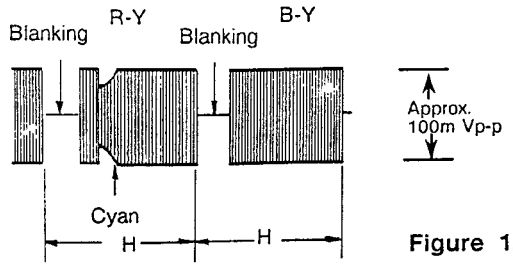

Figure 1.

IDENT COIL (LM04) ADJUSTMENT

1. Receive SECAM colour bar signal.
2. Connect the DC voltmeter (Digital Voltmeter) to the pin 23 of IC501.
3. Adjust LM04 for the maximum indication (approx. DC10V) on the meter.

B-Y, R-Y DEMOD COIL (LM02, LM03) ADJUSTMENT

1. Receive SECAM colour bar signal.
2. Set the COLOUR, BRIGHTNESS and CONTRAST Controls free.
3. Connect the synchroscope to the pin 62 of IC501.
4. Adjust LM02 so that the white level in picture part reaches to the vertical retrace line. (See figure 2.)
5. Then change the connection of synchroscope from the pin 62 to the pin 60 of IC501.
6. Adjust LM03 so that the white level in picture part reaches to the vertical retrace line. (See figure 3.)

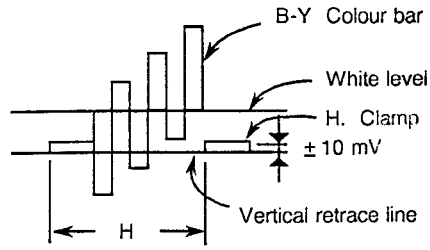

Figure 2.

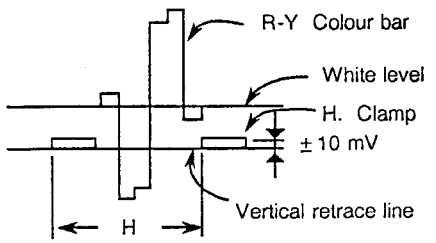

Figure 3.

PAL MATRIX ADJUSTMENT

1. Tune in the colour programme of the Philips pattern.
2. Set the COLOUR Control to obtain the proper colour.
3. If the PAL MATRIX adjustment is incorrect, the Venetian Blind would appear in the colour bars area. This case needs the adjustment.
4. At the first, adjust DL PHASE ADJ. Coil (L551) to minimize the Venetian Blind.
5. Next adjust 1H-DL ADJ. VR (R551) to minimize the Blind.
6. If the Venetian Blind still remains, adjust 1H-DL PHASE ADJ. Coil (L551) to minimize the Blind again.
7. Repeat the item 5 and 6 procedures, adjust the R551 and L551 until the Blind does not appear.

CRT GREY SCALE ADJUSTMENT

1. Tune in an active channel.
2. Turn the SCREEN Control (on T461) fuly counter-clockwise.
3. Set the RED, GREEN and BLUE CUT OFF Controls (R557, R558, R559) counterclockwise to the minimum position.
4. Set the GREEN and BLUE DRIVE Controls (R252, R253) to the mid position.
5. Set the CUT OFF SW. (S202) in the H. line position.
6. Short temporarily terminal of RASTER CHIP on the CRT DRIVE Board.
7. Set the CONTRAST, C[illegible]OUR Controls to minimum and BRIGHTNESS Cont[illegible] to centre. Set the SUB BRIGHTNESS Control to minimum.
8. Rotate the SCREEN Control gradually clockwise until the first horizontal line of a colour [illegible]ED, GREEN or BLUE) appears slightly on the scr[illegible]. Set the SCREEN Control to this position.
9. Open the terminal of RASTER CHIP on the CRT DRIVE Board.
10. Adjust the CUT OFF Controls to obtain the slightly lighted horizontal lines in the same levels of three colours (RED, GREEN and BLUE). The lines may look like white if the CUT OFF Controls are adjusted properly.
11. Return the CUT OFF SW. (S202) in the receiving position.
12. Set the BRIGHTNESS Control to the maximum and COLOUR Control to the minimum.
13. Adjust the BLUE and GREEN DRIVE Controls (R252/R253) to obtain proper white-balanced picture in high light areas.
14. Set the BRIGHTNESS and CONTRAST Controls to obtain dark grey raster. Then check the white balance in low brightness. If the white balance is not proper, retouch the CUT OFF Controls and DRIVE Controls to obtain a good white balance in both low and high light areas.

SUB-BRIGHTNESS ADJUSTMENT

1. Tune in a colour programme.
2. Set the CONTRAST Control to the maximum and the BRIGHTNESS Control to the centre.
3. Set the COLOUR Control to the minimum.
4. Set the SUB-BRIGHT. Control (R255) to the centre and leave the receiver for five minutes in this state.
5. Watching the picture well, adjust the SUB-BRIGHT. Control in the position where the picture does not show evidence of blooming in high bright area and not appear too dark in low bright portion.
6. Check the proper picture variation by rotating the CONTRAST and BRIGHTNESS Controls to both extremes.
7. If the picture does not appear dark with the CONTRAST and BRIGHTNESS Controls turned to the minimum, or not appear bright with the controls turned to the maximum, adjust the SUB-BRIGHT. Control again for the acceptable picture.

PICTURE I-F SWEEP ALIGNMENT

GENERAL ..... Refer to figure 4 for test equipment connection.

PRELIMINARY STEPS ..... 1. Supply +12 volts to the IF Board.
2. Short the collector of QN15 to ground. Short the pin 24 of IC101 through the 10μF to ground.

SWEEP/MARKER GENERATOR ..... Connect to pin 6 of P101 as shown in figure 4 on the IF Board. Set to 30 ~ 40 MHz sweep with signal level of 75 ~ 85 dBμ.

OSCILLOSCOPE ..... Connect to pin 1 of IC101 on the IF Board through the detector.

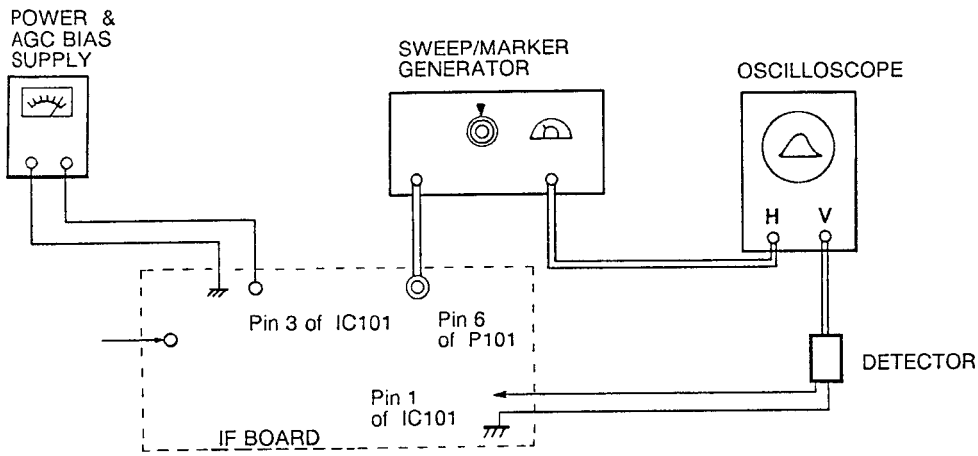

Figure 4. Picture IF Sweep Alignment

STEP	SWEEP/MARGER GENERATOR	ADJUST	REMARKS
1. Detector Coil	37.4 MHz Marker "ON"	L151	• Short the collector of QN08 on the IF Board to ground. • Supply +2 to +3 volts to pin 3 of IC101 to set the output level for 0.4 Vp-p on the scope. • Adjust L151 so that the marker position (37.4 MHz) on the response can lower to minimum. (See figure 5.) • Remove the short of the collector of QN08. • After completing CN51 adjustment, repeat this step again.
2. Detector Capacitor	32.7 MHz Marker "ON"	CN51	• Short the base of QN08 to ground. • Supply +2 to +3 volts to pin 3 of IC101 to set the detection output for 0.4 Vp-p on the scope. • Adjust CN51 so that the marker position (32.7 MHz) on the response can lower to minimum. (See figure 5.) • Remove the short of base of QN08. • After completing L151 adjustment, repeat the step again.
After completing the above steps, disconnect the equipment and re-solder the liniks on the Main Board, and adjust the AGC Delay control (R151) following DELAYED RF AGC ADJUSTMENTS.			

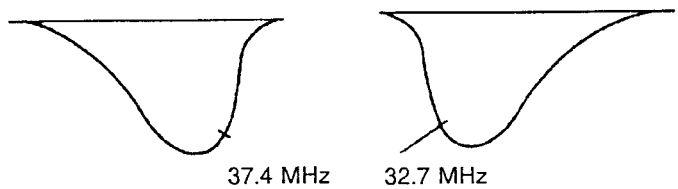

Figure 5. Magnified Response Curve

AFC ALIGNMENT

GENERAL ..... Refer to figure 6 for test equipment connection.

PRELIMINARY STEPS .....
1. Disconnect the IF Board from the Main Board.
2. Disconnect the solder link on the foil side of IF Board.
3. Supply +12 volts to the IF Board. (See figure 6.)
4. Short the collector of QN15 to ground.
5. Turn AGC DELAY Control (R151) on the IF Board fully clockwise.

DVM ..... Connect to the resistor R128 (ⓔ in figure 6) and ground.

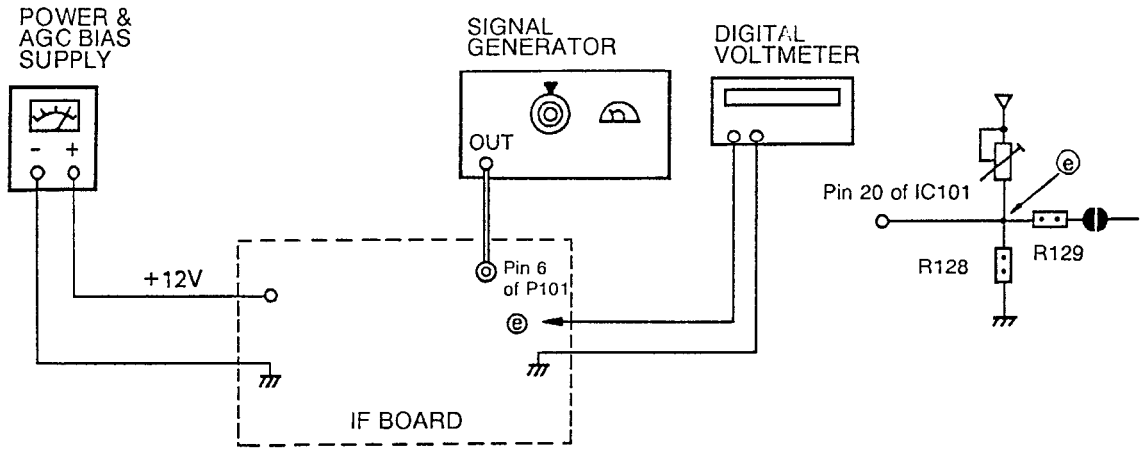

Figure 6. AFC Alignment

STEP	SIGNAL GENERATOR	ADJUST	REMARKS
1. AFC Balance (R153)	NO SIGNAL	R153	• Short the pin 3 of IC101 to ground. • Adjust R153 for 4.5 volts at the point ⓔ in figure 6.
2. AFC Coil (L153)	37.4 MHz CARRIER WAVE (Level : 75 to 85 dBμ)	L153	• Remove the short of pin 3 of IC101. • Short the collector of QN08 to ground. • Connect IF carrier wave to the pin 6 of P101 in figure 6. • Adjust L153 for 2.5 volts on the meter at the point ⓔ. • After completing L152 adjustment, repeat this step again.
3. AFC Capacitor (L152)	32.7 MHz CARRIER WAVE (Level : 75 to 85 dbμ)	L152	• Remove the short of collector of QN08. • Connect IF carrier wave to the pin 6 of P101 in figure 6. • Adjust L152 for 2.5 volts on the meter at the point ⓔ. • After completing L153 adjustment, repeat this step again.

SECAM DET-OUT & SOUND IF ALIGNMENT

L SECAM DET-OUT (R152) ADJUSTMENT

1. Disconnect the IF Board from the Main Board.
2. Supply +12 V to the IF Board.
   2-1 Short the base of QN15 to ground.
   2-2 Short the collector of QN08 to ground.
3. Set AGC to Self AGC condition.
4. Connect synchroscope to the emitter of Q103 through 10:1 probe.
5. Connect the 2-signal generator to IF input, and set up the generator as described below.
   IF frequency : 32.7 MHz
   Signal level : 75 to 85 dBμ
   Video modulation
   Positive modulation : 97%
   Video signal fH : 15.625 kHz
   Picture : Pattern with 100% white
6. Adjust the AC LEVEL Control (R152) for 2.0Vp-p on the scope.

I-PAL SIF DET (L652) ADJUSTMENT

1. Supply +12V to pin 11 of P601.
2. Supply +12V to pin 1 of P601.
3. Connect SIF generator to base of Q602 through 0.01 μF capacitor.
4. Connect the oscilloscope to pin 3 of P601.
5. Set up the SIF generator as described below.
   Sound carrier frequency : 6.0 MHz
   Modulation frequency : 1000 Hz
   Frequency deviaiton : ±15 kHz
   Signal level : 80 dBμ (50 ohm load)
6. Adjust L652 for the maximum response of 1000 Hz det-out on scope.

B/G-PAL SOUND DET (L651) ADJUSTMENT

1. Connect pin 11 of P601 to ground.
2. Supply +12V to pin 1 of P601.
3. Connect the SIF generator to base of Q602 through 0.01 μF capacitor.
4. Connect the oscilloscope to pin 3 of P601.
5. Set up the SIF generator as described below.
   Sound carrier frequency : 5.5 MHz
   Modulation frequency : 1000 Hz
   Frequency deviaiton : ±15 kHz
   Signal level : 80 dBμ (50 ohm load)
6. Adjust L651 for the maximum response of 1000 Hz det-out on scope.

TROUBLESHOOTING CHARTS

The following charts are devoted to troubleshooting which, if followed carefully, will assist you in tracking down a fault to the correct stage.
In order to utilize the charts (fault trees), firstly establish the complaint, i.e. – No Raster, No Sound.
Locate the chart applicable and then progress through the various alternatives until a final block indicates the offending components or stage.

1. NO RASTER AND NO SOUND

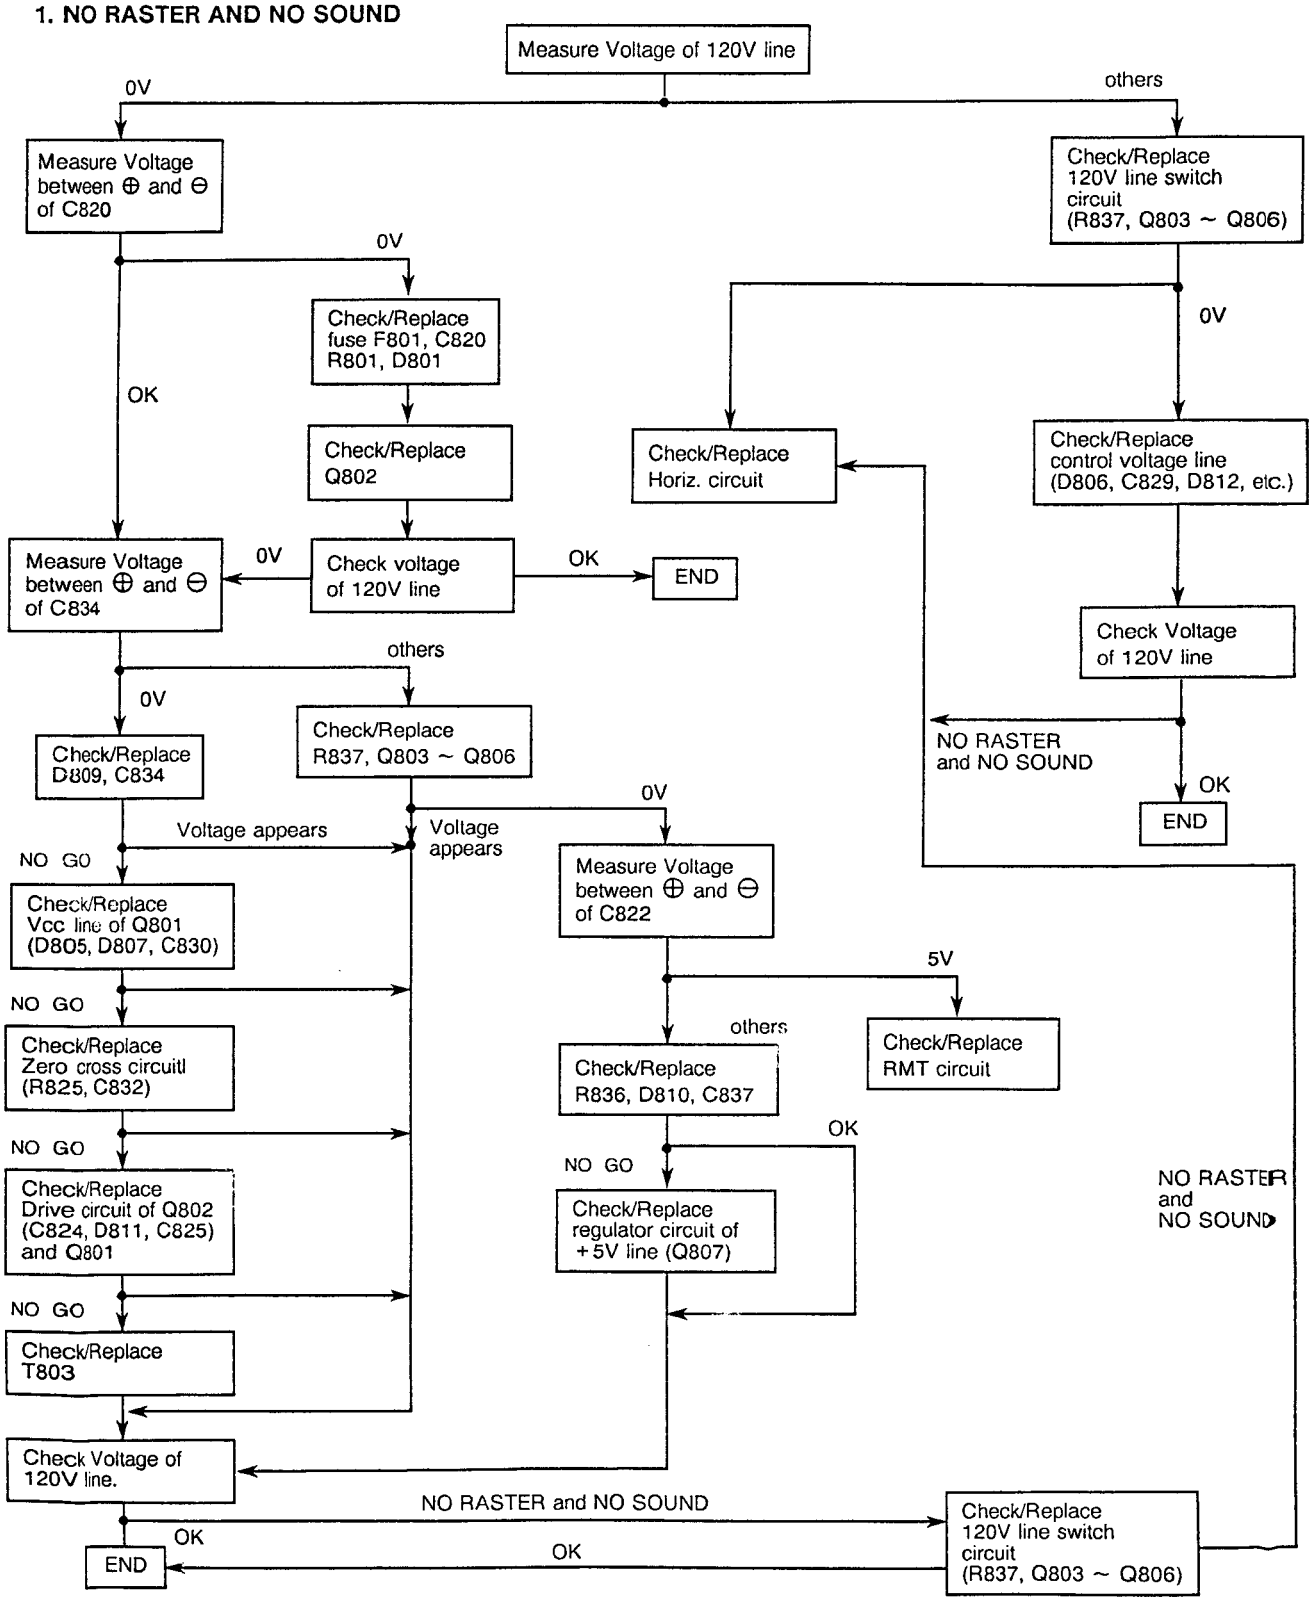

2. NO RASTER (NOISE OR WEAK SOUND)

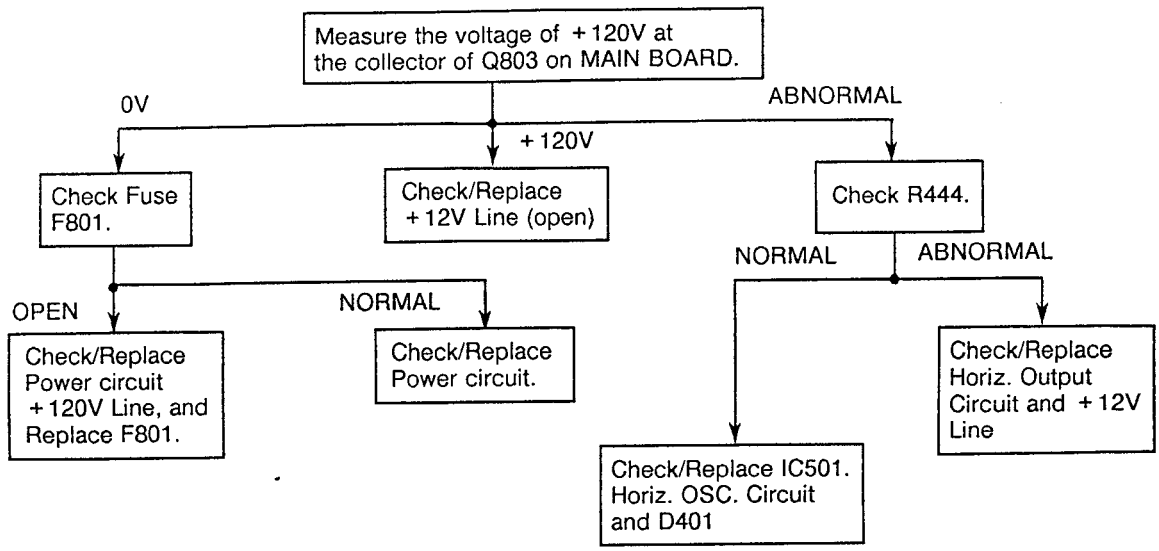

3. NO RASTER (SOUND OK)

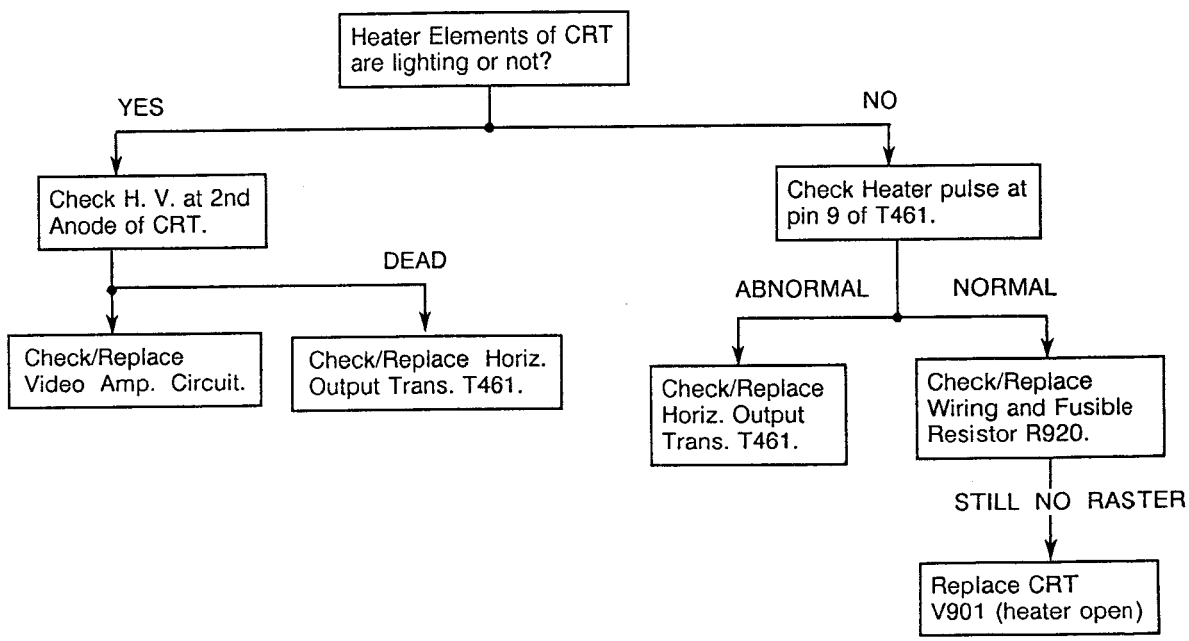
Heater Elements of CRT are lighting or not?
YES
NO
Check H. V. at 2nd Anode of CRT.
Check Heater pulse at pin 9 of T461.
DEAD
ABNORMAL
NORMAL
Check/Replace Video Amp. Circuit.
Check/Replace Horiz. Output Trans. T461.
Check/Replace Horiz. Output Trans. T461.
Check/Replace Wiring and Fusible Resistor R920.
STILL NO RASTER
Replace CRT V901 (heater open)

4. NO SOUND

Note: Check the sound signal waveform for shaded area below.

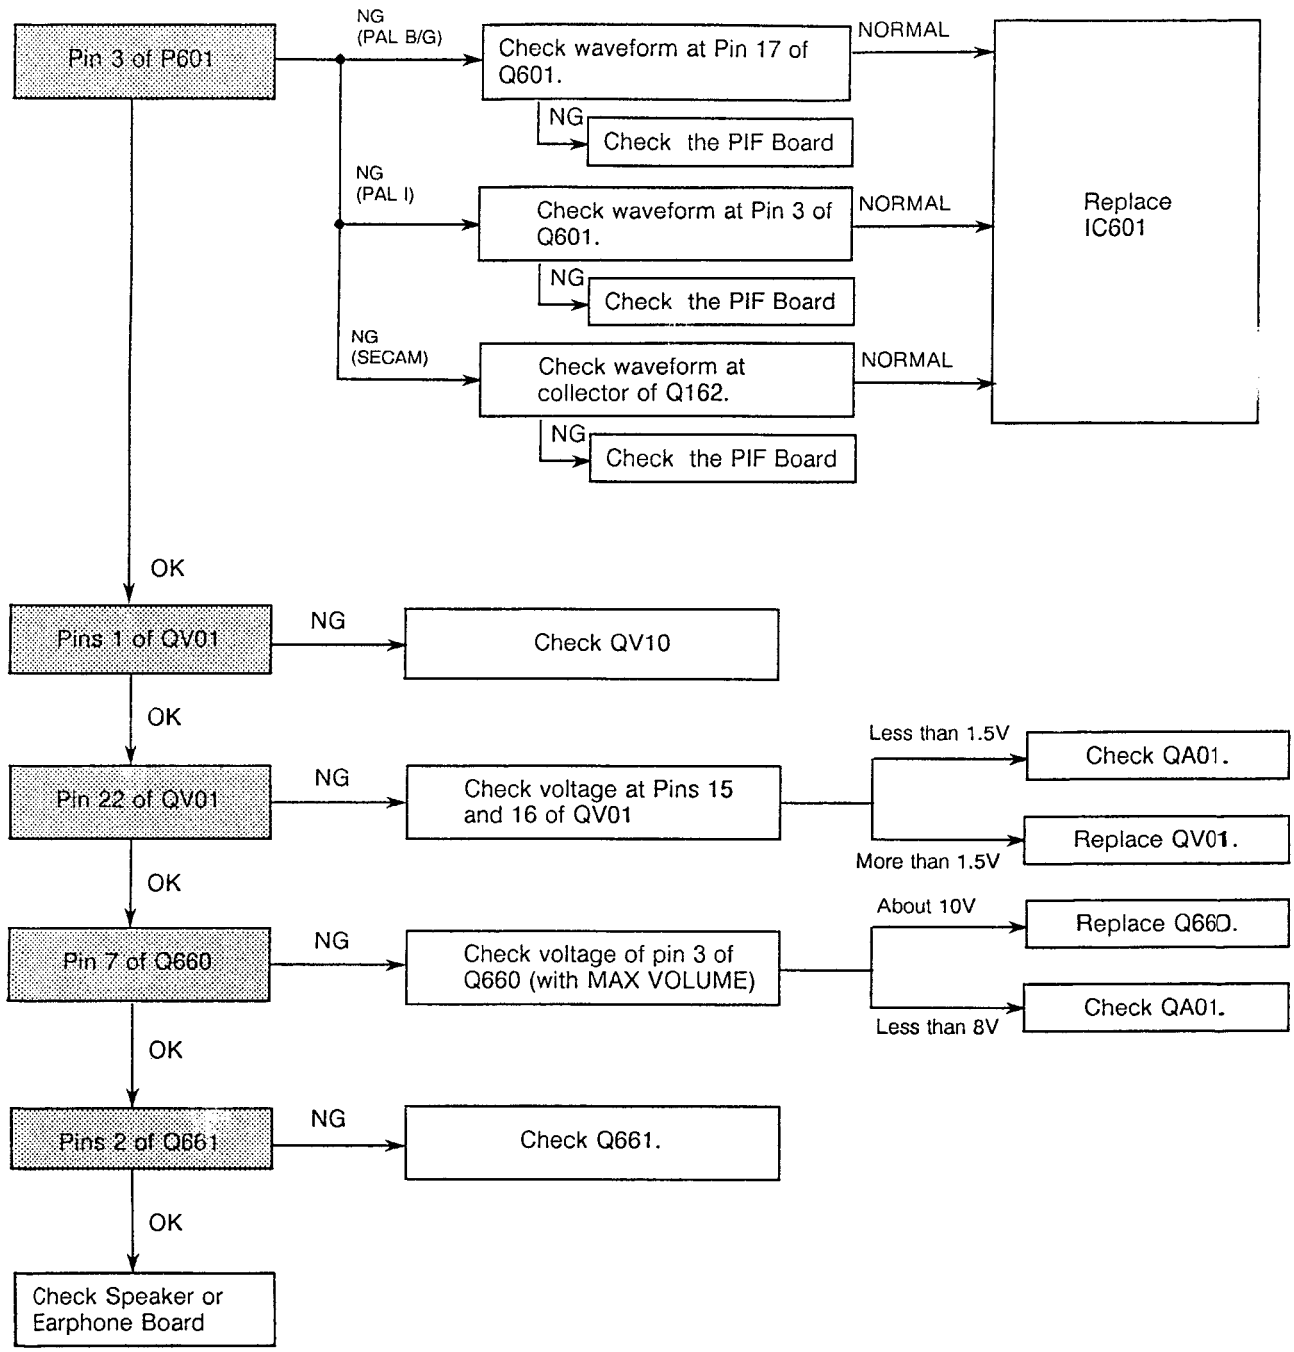

5. NO PICTURE

Check video signal waveform for shaded area below.

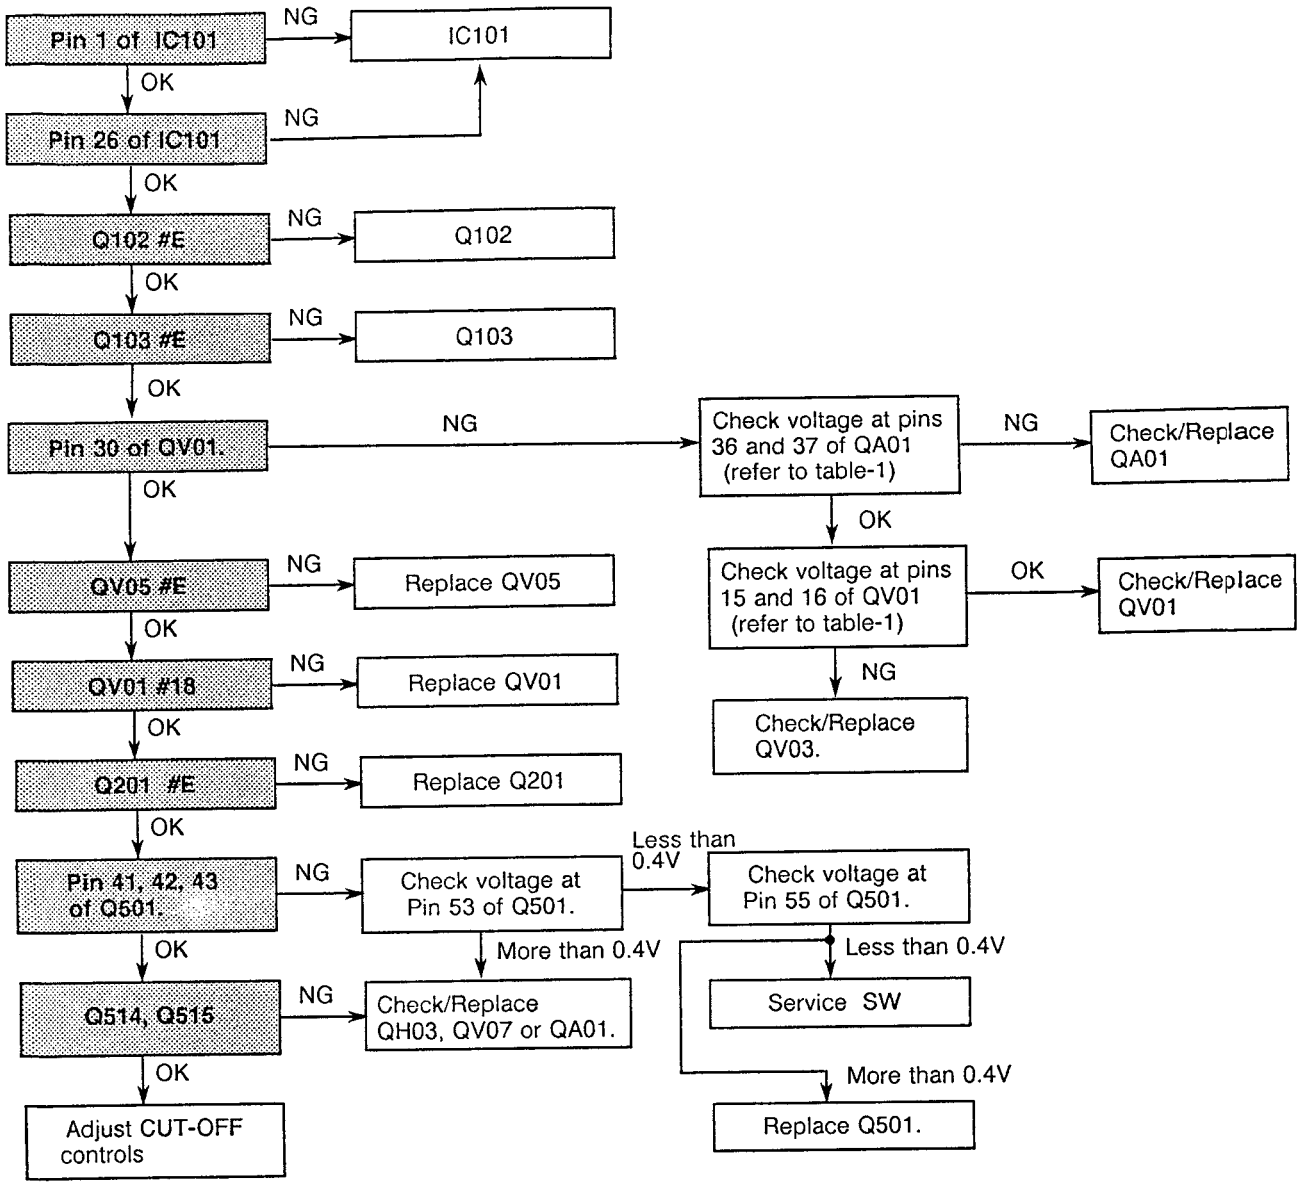

Table-1 (A/V SW. LOGIC)

MODE	QA01		QV01	
	Pin 36	Pin 37	Pin 15	Pin 16
TV	*H	*H	*H	*H
VIDEO-1	H	L	H	L
VIDEO-2	L	L	L	L
VIDEO-2S	L	H	L	H

L : Less than 2.5V
H : More than 2.5V

Note: * marks denote as follows.
AV SW LOGIC is same as VIDEO-1 mode when pin 8 of 21 PIN-1 is high level.
AV SW LOGIC is same as VIDEO-2 mode when pin 8 of 21 PIN-1 is high level.
AV SW LOGIC is same as VIDEO-1 mode when pin 8 of 21 PIN-1 and 21 PIN-2 are high level.

6. CHANNEL SELECTOR TROUBLE

[CHART 1]

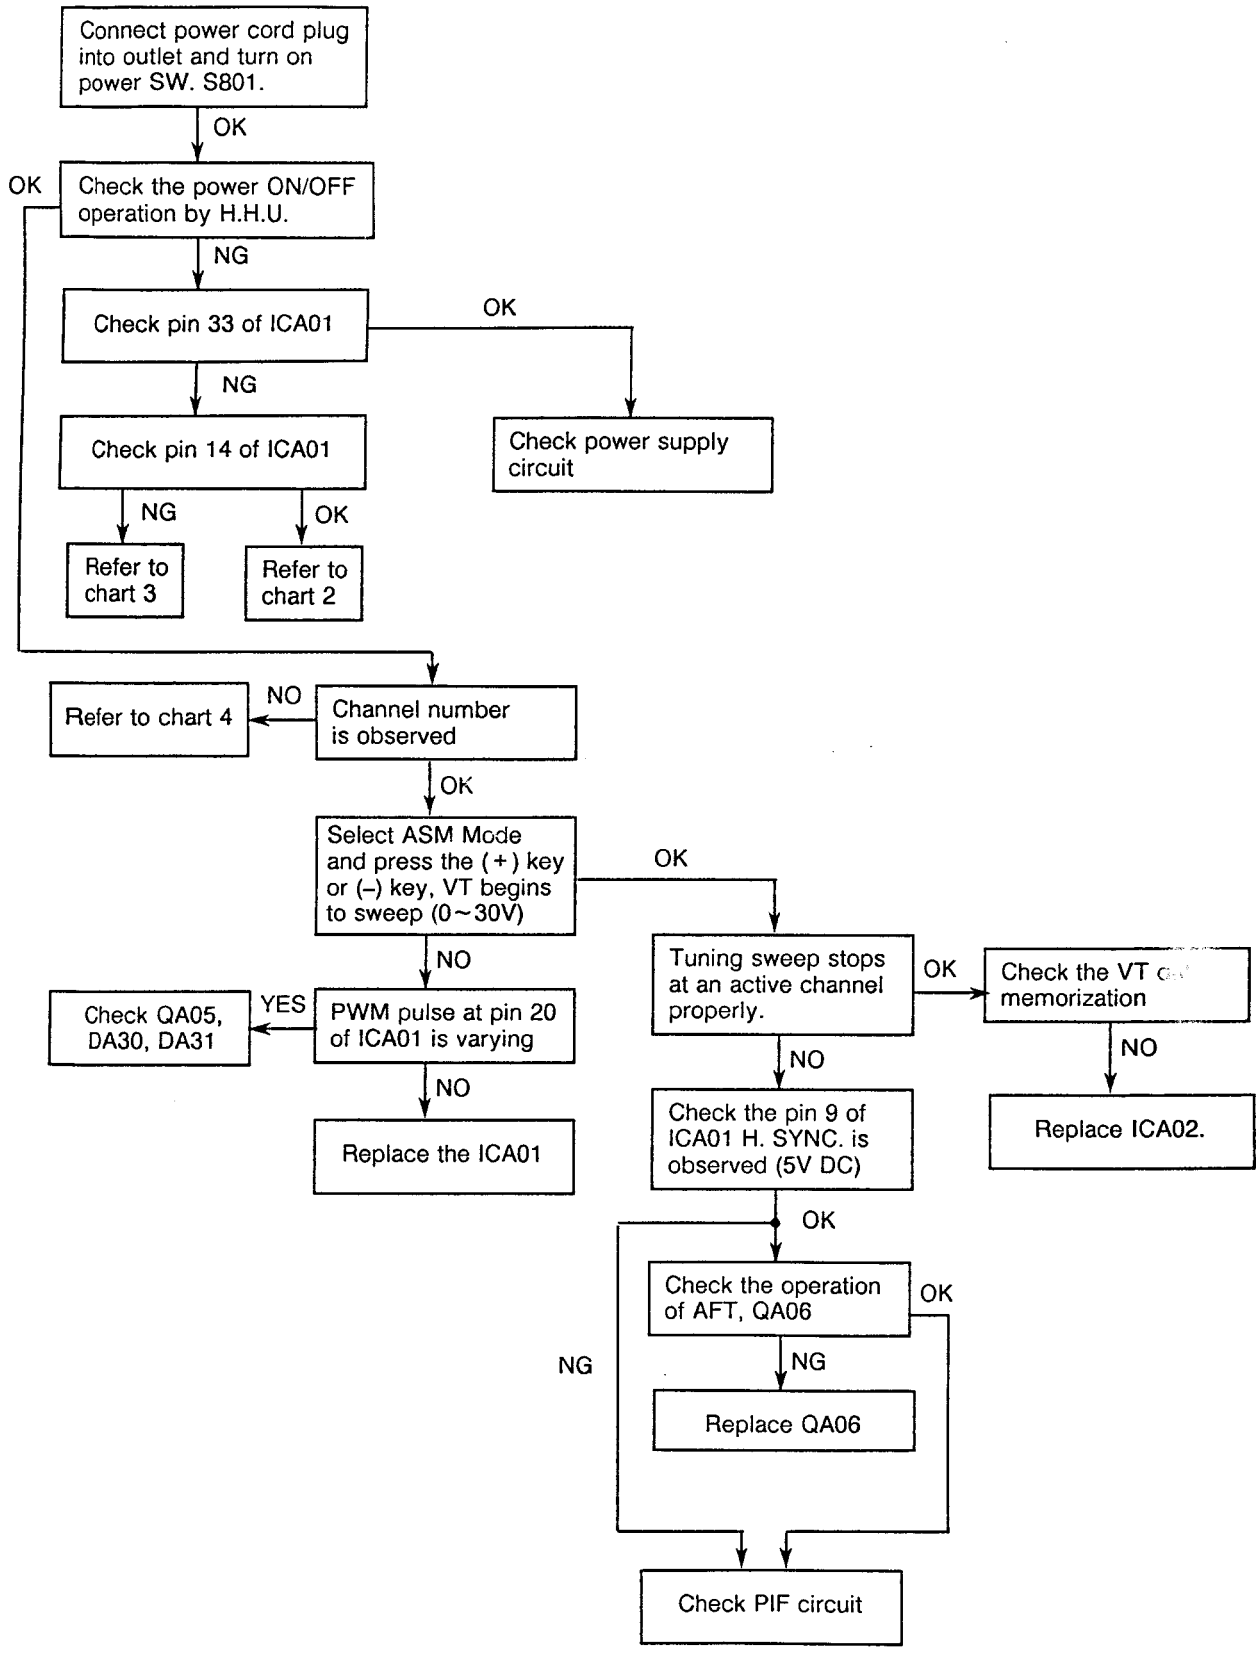

[CHART 2] Microcomputer (ICA01) Operation Check

NOTE: Before checking Microcomputer, check that control buttons and their connection work properly.

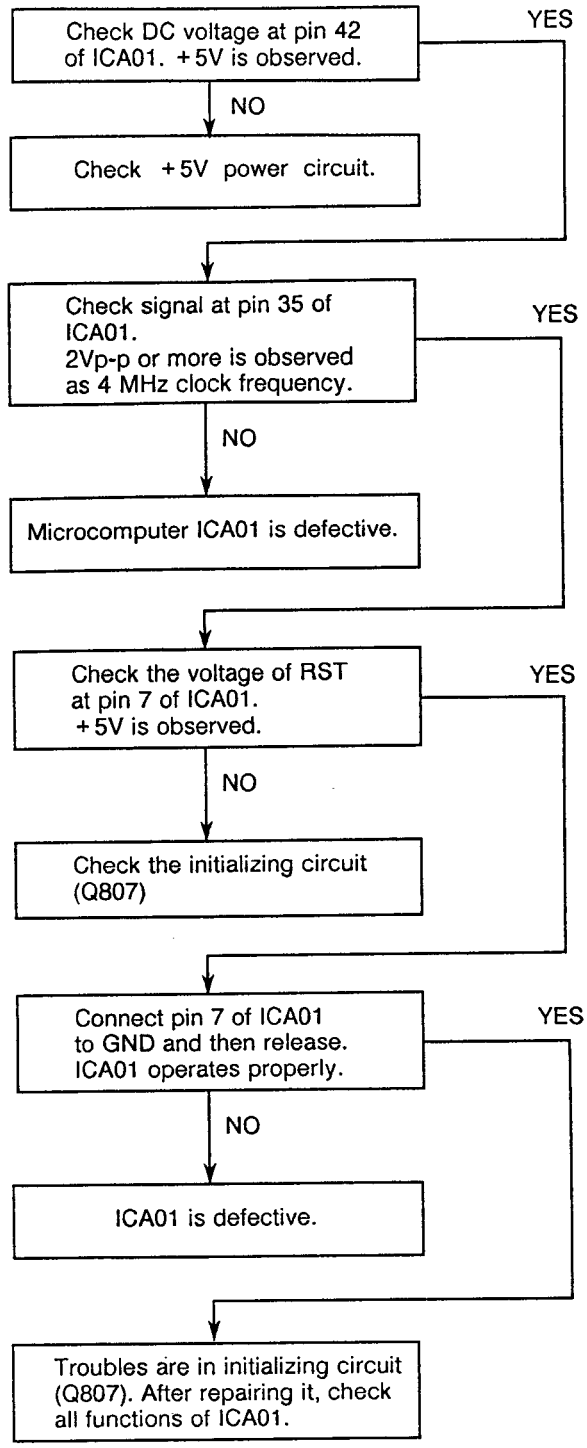
Check DC voltage at pin 42 of ICA01. +5V is observed.
YES
NO
Check +5V power circuit.
Check signal at pin 35 of ICA01. 2Vp-p or more is observed as 4 MHz clock frequency.
YES
NO
Microcomputer ICA01 is defective.
Check the voltage of RST at pin 7 of ICA01. +5V is observed.
YES
NO
Check the initializing circuit (Q807)
Connect pin 7 of ICA01 to GND and then release. ICA01 operates properly.
YES
NO
ICA01 is defective.
Troubles are in initializing circuit (Q807). After repairing it, check all functions of ICA01.

[CHART 3] Remote Control Operation Check

Note : Before checking RMT operation, check that key operation on TV set is proper.

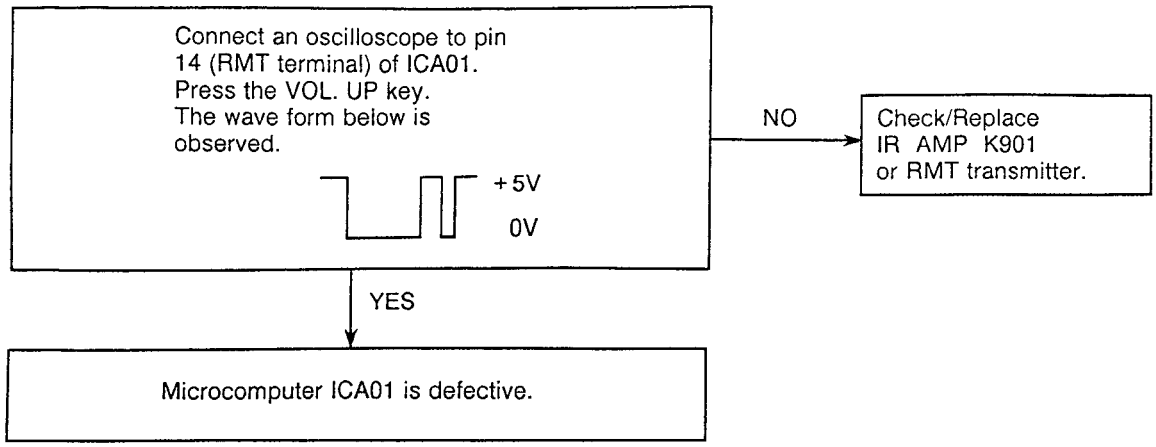
Connect an oscilloscope to pin 14 (RMT terminal) of ICA01.
Press the VOL. UP key.
The wave form below is observed.
+5V
0V
NO
Check/Replace IR AMP K901 or RMT transmitter.
YES
Microcomputer ICA01 is defective.

[CHART 4] On Screen Display Operation Check

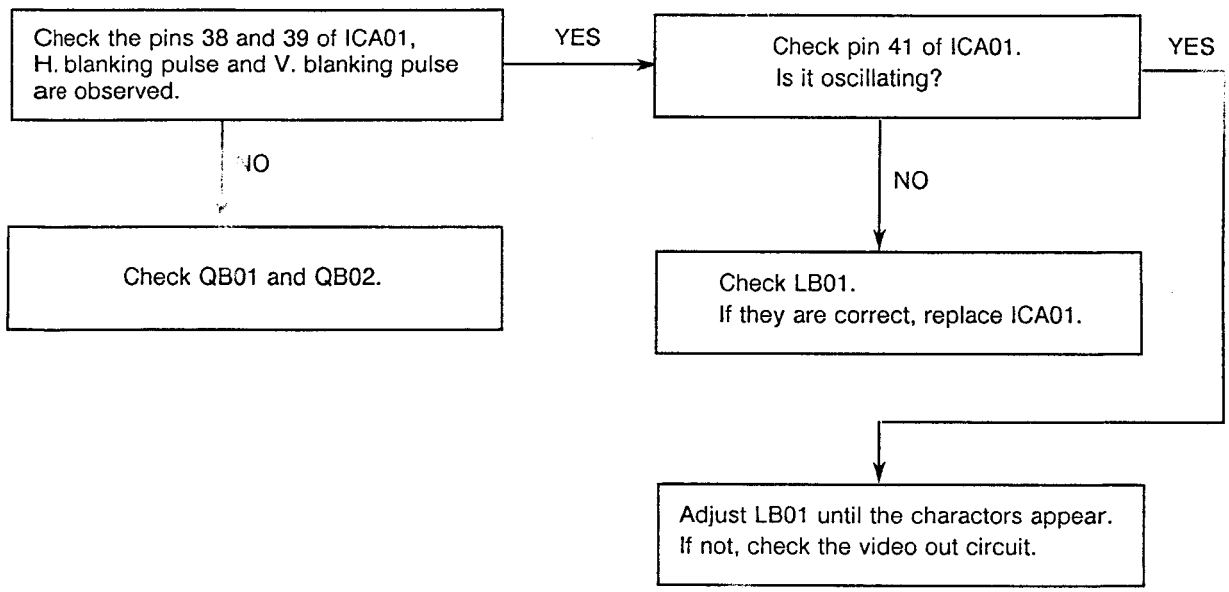
Check the pins 38 and 39 of ICA01, H. blanking pulse and V. blanking pulse are observed.
YES
Check pin 41 of ICA01. Is it oscillating?
YES
NO
Check QB01 and QB02.
Check LB01. If they are correct, replace ICA01.
Adjust LB01 until the charactors appear. If not, check the video out circuit.

7. NO VERT. SCAN (ONE HORIZ. LINE RASTER)

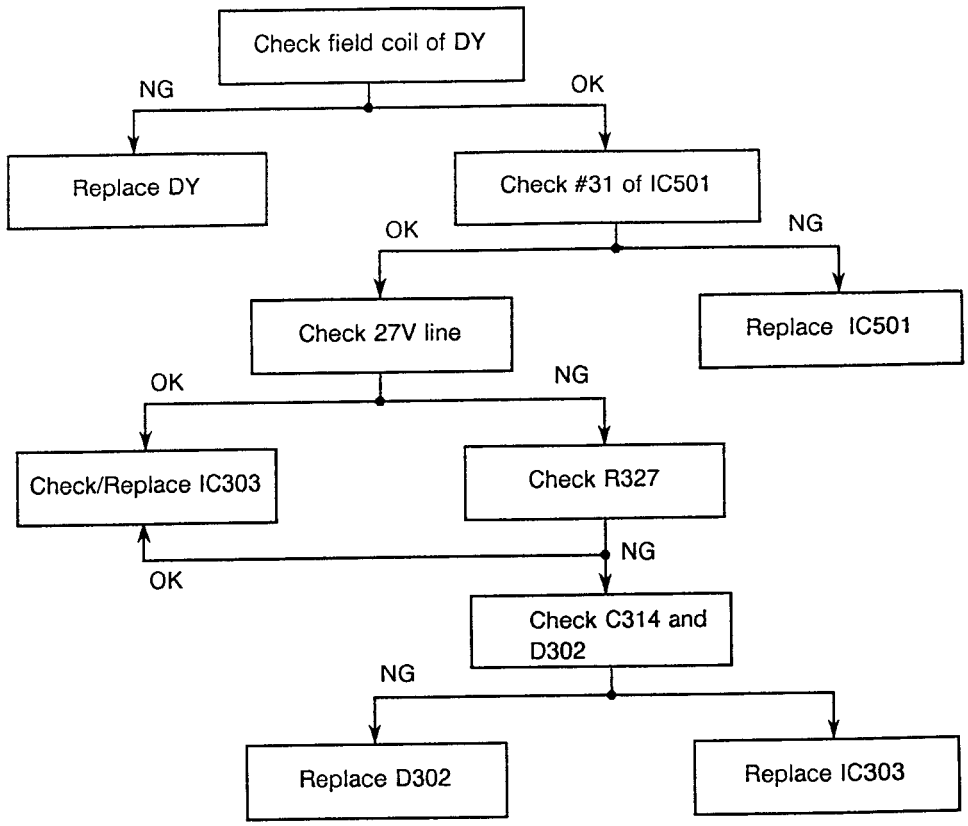

8. OUT OF VERT. SYNC. AND HORIZ. SYNC.

Check/Replace Sync Circuit pin 33 of IC501.

9. OUT OF HORIZ. SYNC.

Check/Replace Horiz. OSC Circuit and Horiz. AFC Circuit connected to Pins 36, 37 and 38 of IC501.
Check/Replace IC501.

CABINET REPLACEMENT PARTS LIST

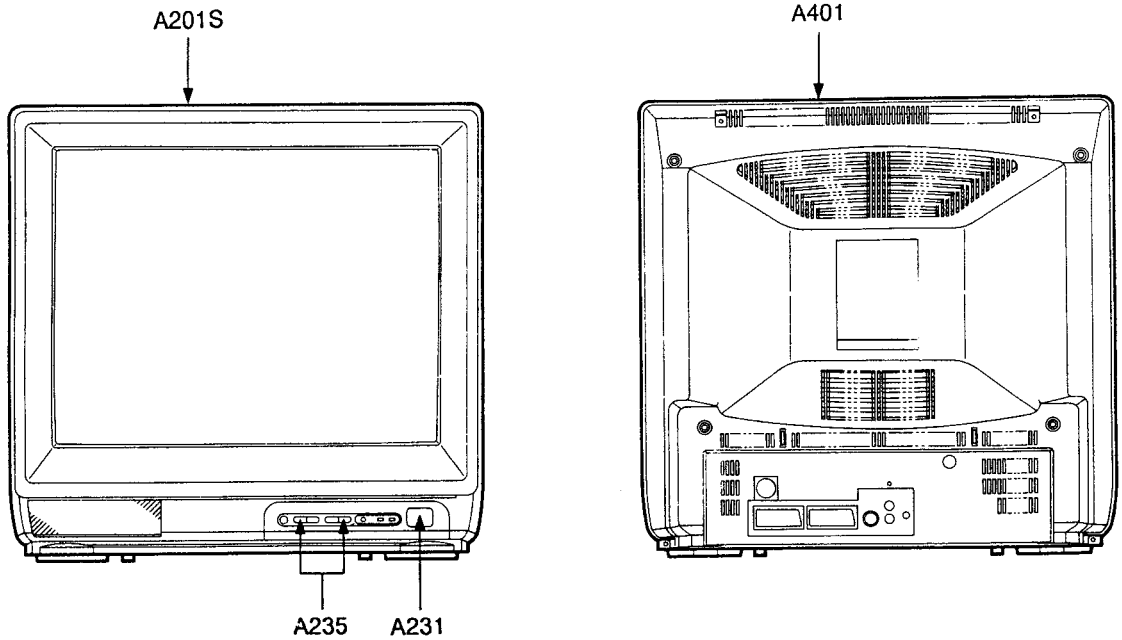

2100RFT

Location No.	Part No.	Description
A201S	23418533	Front Cover
A231	23443465	Button, POWER
A235	23443466	Button, UP-DOWN
A401	23423519	Back Cover
A411	23998982	Label, Model No., B/C
A420	23838432	Ornament, Terminal Trim
A421	23838433	Ornament, Tuner
A701	23523649	Carton Box
A702	23934241	Packing, Bottom
A703	23934242	Packing, Top
A710	23998981	Lable, Model No., Carton
Y101	23994847	Owner's Manual

2101RFZ

Location No.	Part No.	Description
A201S	23418644	Front Cover
A215	23431440	Ornament, Speaker
A231	23443500	Knob, POWER
A235	23443501	Knob, UP-DOWN
A239	23431440	Ornament, Speaker
A401	23423519	Back Cover
A411	23567083	Label, Model No., B/C
A420	23838432	Ornamenrt, Trim
A701	23523662	Carton Box
A702	23934241	Packing, Bottom
A703	23934242	Packing, Top
A710	23567084	Label, Model No., Carton
Y101	23994847	Owner's Manual

CHASSIS REPLACEMENT PARTS LIST

WARNING: BEFORE SERVICING THIS CHASSIS, READ THE "X-RAY RADIATION PRECAUTION" , "SAFETY PRECAUTION" AND "PRODUCT SAFETY NOTICE" ON PAGE 2 OF THIS MANUAL.

CAUTION: The international hazard symbols in the schematic diagram and the parts list designate components which have special characteristics important for safety and should be replaced only with types identical to those in the original circuit or specified in the parts list. The mounting position of replacements is to be identical with originals. Before replacing any of these components, read carefully the PRODUCT SAFETY NOTICE on page 2. Do not degrade the safety of the receiver through improper servicing.

NOTICE: The part number must be used when ordering parts, in order to assist in processing, be sure to include the Model number and Description.

ABBREVIATIONS:

Capacitors..... CD : Ceramic Disk PF : Plastic Film EL : Electrolytic
Resistors..... CF : Carbon Film CC : Carbon Composition MF : Metal Film
OMF : Oxide Metal Film VR : Variable Resistor FR : Fusible Resistor

(All CD and PF capacitors are ±5%, 50V and all resistors, ±5%, 1/6W unless otherwise noted.)

Location No.	Part No.	Description
CAPACITORS		
C101	24212102	CD, 1000pF, ±10%
C102	24212102	CD, 1000pF, ±10%
C104	24797220	EL, 22μF, 50V
C105	24232103	CD, 0.01μF, +80%, −20%
C106	24636229	EL, 2.2μF, 50V
C107	24550473	PF, 0.047μF, 63V
C108	24707474	Tantalum, 0.47μF, ±20%, 35V
C109	24232103	CD, 0.01μF, +80%, −20%
C110	24232103	CD, 0.01μF, +80%, −20%
C111	24636229	EL, 2.2μF, 50V
C112	24436510	CD, 51pF
C113	24636478	EL, 0.47μF, 50V
C114	24794470	EL, 47μF, 16V
C115	24232103	CD, 0.01μF, +80%, −20%
C116	24232103	CD, 0.01μF, +80%, −20%
C117	24085029	EL, 4.7μF, 16V, Non-Polar
C118	24232103	CD, 0.01μF, +80%, −20%
C119	24232103	CD, 0.01μF, +80%, −20%
C120	24212222	CD, 2200pF, ±10%
C121	24085988	EL, 1μF, ±20%, 50V, Non-Polar
C122	24550153	PF, 0.015μF, 63V
C123	24636478	EL, 0.47μF, 50V
C124	24794101	EL, 100μF, 16V
C125	24232103	CD, 0.01μF, +80%, −20%
C126	24212152	CD, 1500pF, ±10%
C127	24794471	EL, 470μF, 16V
C161	24212102	CD, 1000pF, ±10%
C162	24212102	CD, 1000pF, ±10%
C163	24212102	CD, 1000pF, ±10%
C164	24232103	CD, 0.01μF, +80%, −20%
C165	24212102	CD, 1000pF, ±10%
C166	24212102	CD, 1000pF, ±10%
C167	24353560	CD, 56pF
C168	24232103	CD, 0.01μF, +80%, −20%
C169	24232103	CD, 0.01μF, +80%, −20%
C170	24232103	CD, 0.01μF, +80%, −20%
C201	24636100	EL, 10μF, 50V
C202	24795101	EL, 100μF, 25V

Location No.	Part No.	Description
C203	24232103	CD, 0.01μF, +80%, −20%
C204	24797220	EL, 22μF, 50V
C205	24636478	EL, 0.47μF, 50V
C208	24212102	CD, 1000pF, ±10%
C209	24232103	CD, 0.01μF, +80%, −20%
C210	24636100	EL, 10μF, 50V
C211	24212561	CD, 560pF, ±10%
C212	24636010	EL, 1μF, 50V
C213	24550104	PF, 0.1μF, 63V
C214	24633101	EL, 100μF, 16V
C240	24530474	PF, 0.47μF, ±10%, 63V
C241	24633100	EL, 10μF, 16V
C301	24636229	EL, 2.2μF, 50V
C302	24212152	CD, 1500pF, ±10%
C303	24617912	EL, 2.2μF, ±10%, 50V
C304	24212102	CD, 1000pF, ±10%
C307	24232103	CD, 0.01μF, +80%, −20%
C312	24593243	PF, 0.024μF
C313	24755101	EL, 100μF, 35V
C314	24796102	EL, 1000μF, 35V
C315	24214221	CD, 220pF, ±10%, 500V
C316	24667332	EL, 3300μF, ±20%, 25V
C317	24617912	EL, 2.2μF, ±10%, 50V
C318	24082049	PF, 0.047μF, 100V
C319	24693104	PF, 0.1μF, 100V
C321	24214561	CD, 560pF, ±10%, 500V
C328	24212272	CD, 2700pF, ±10%
C368	24530104	PF, 0.1μF, ±10%, 63V
C402	24353241	CD, 240pF
C403	24636339	EL, 3.3μF, 50V
C405	24593203	PF, 0.02μF
C406	24593203	PF, 0.02μF
C407	24593243	PF, 0.024μF
C408	24636100	EL, 10μF, 50V
C409	24232103	CD, 0.01μF, +80%, −20%
C412	24550182	PF, 1800pF, 63V
C413	24550182	PF, 1800pF, 63V
C414	24212471	CD, 470pF, ±10%
C416	24214271	CD, 270pF, ±10%, 500V
C423	24232103	CD, 0.01μF, +80%, −20%
C424	24795470	EL, 47μF, 25V

Location No.	Part No.	Description
C425	24794101	EL, 100μF, 16V
⚠ C440	24095636	PF, 7200pF, ±3%, 1600V
C441	24214221	CD, 220pF, ±10%, 500V
C443	24214221	CD, 220pF, ±10%, 500V
C445	24095903	PF, 0.056μF, ±10%, 250V
C447	24644479	EL, 4.7μF, 250V
C448	24795102	EL, 1000μF, 25V
C449	24794471	EL, 470μF, 16V
C451	24640908	EL, 33μF, ±20%, 160V
⚠ C463	24212222	CD, 2200pF, ±10%
C465	24095949	PF, 0.33μF, 200V
C502	24636100	EL, 10μF, 50V
C503	24436101	CD, 100pF
C504	24436101	CD, 100pF
C505	24550273	PF, 0.027μF, 63V
C506	24232103	CD, 0.01μF, +80%, −20%
C507	24530103	PF, 0.01μF, ±10%, 63V
C508	24085028	EL, 2.2μF, 25V, Non-Polar
C509	24797220	EL, 22μF, 50V
C510	24232103	CD, 0.01μF, +80%, −20%
C511	24232103	CD, 0.01μF, +80%, −20%
C512	24353200	CD, 20pF
C513	24353330	CD, 33pF
C515	24636220	EL, 22μF, 50V
C516	24530104	PF, 0.1μF, ±10%, 63V
C517	24530104	PF, 0.1μF, ±10%, 63V
C518	24232103	CD, 0.01μF, +80%, −20%
C519	24232103	CD, 0.01μF, +80%, −20%
C520	24636478	EL, 0.47μF, 50V
C521	24530474	PF, 0.47μF, ±10%, 63V
C522	24530474	PF, 0.47μF, ±10%, 63V
C523	24530474	PF, 0.47μF, ±10%, 63V
C524	24232103	CD, 0.01μF, +80%, −20%
C525	24436820	CD, 82pF
C526	24436820	CD, 82pF
C527	24436820	CD, 82pF
C530	24796220	EL, 22μF, 35V
C532	24436430	CD, 43pF
C533	24436430	CD, 43pF
C534	24436330	CD, 33pF
C535	24636100	EL, 10μF, 50V
C536	24636478	EL, 0.47μF, 50V
C537	24794101	EL, 100μF, 16V
C539	24232103	CD, 0.01μF, +80%, −20%
C540	24633100	EL, 10μF, 16V
C550	24232103	CD, 0.01μF, +80%, −20%
C551	24212102	CD, 1000pF, ±10%
C601	24212102	CD, 1000pF, ±10%
C603	24232103	CD, 0.01μF, +80%, −20%
C604	24794470	EL, 47μF, 16V
C605	24598911	PF, 910pF
C606	24598821	PF, 820pF
C607	24550104	PF, 0.1μF, 63V
C608	24636100	EL, 10μF, 50V
C609	24232103	CD, 0.01μF, +80%, −20%
C610	24232103	CD, 0.01μF, +80%, −20%
C611	24232103	CD, 0.01μF, +80%, −20%
C612	24436470	CD, 47pF
C613	24436470	CD, 47pF
C614	24232103	CD, 0.01μF, +80%, −20%
C615	24550473	PF, 0.047μF, 63V
C616	24550473	PF, 0.047μF, 63V
C617	24232103	CD, 0.01μF, +80%, −20%

Location No.	Part No.	Description
C660	24085031	EL, 1μF, ±20%, 25V, Non-Polar
C661	24636100	EL, 10μF, 50V
C662	24636100	EL, 10μF, 50V
C663	24797470	EL, 47μF, 50V
C664	24636010	EL, 1μF, 50V
C665	24796221	EL, 220μF, 35V
C666	24550104	PF, 0.1μF, 63V
C667	24795471	EL, 470μF, 25V
C668	24636478	EL, 0.47μF, 50V
C669	24550682	PF, 6800pF, 63V
C670	24634220	EL, 22μF, 25V
C697	24550224	PF, 0.22μF, 63V
C698	24636479	EL, 4.7μF, 50V
C699	24634470	EL, 47μF, 25V
⚠ C801	24098999	PF, 0.1μF, ±20%, AC250V
⚠ C805	24094656	CD, 2200pF, ±20%, AC400V
⚠ C806	24094656	CD, 2200pF, ±20%, AC400V
⚠ C815	24092281	CD, 4700pF, ±20%, AC250V
⚠ C816	24092281	CD, 4700pF, ±20%, AC250V
⚠ C817	24092281	CD, 4700pF, ±20%, AC250V
⚠ C818	24092281	CD, 4700pF, ±20%, AC250V
C820	24086871	EL, 120μF, ±20%, 400V
C821	24436101	CD, 100pF
C822	24636100	EL, 10μF, 50V
C823	24550682	PF, 6800pF, 63V
C824	24630747	EL, 22μF, ±20%, 25V
C825	24212102	CD, 1000pF, ±10%
C826	24442331	CD, 330pF, ±10%, 2kV
C827	24232103	CD, 0.01μF, +80%, −20%
C828	24095914	PF, 2200pF, ±3%, 1600V
C829	24636010	EL, 1μF, 50V
C830	24797101	EL, 100μF, 50V
C831	24436331	CD, 330pF
C832	24593822	PF, 8200pF
C833	24442181	CD, 180pF, ±10%, 2kV
C834	24086953	EL, 220μF, ±20%, 160V
C835	24797220	EL, 22μF, 50V
C836	24214331	CD, 330pF, ±10%, 500V
C837	24795222	EL, 2200μF, 25V
C901	24644479	EL, 4.7μF, 250V
C902	24095923	PF, 4700pF, 1600V
CA01	24212331	CD, 330pF, ±10%
CA02	24232103	CD, 0.01μF, +80%, −20%
CA07	24212102	CD, 1000pF, ±10%
CA08	24232103	CD, 0.01μF, +80%, −20%
CA09	24794470	EL, 47μF, 16V
CA10	24232103	CD, 0.01μF, +80%, −20%
CA11	24530472	PF, 4700pF, ±10%, 63V
CA12	24212561	CD, 560pF, ±10%
CA13	24633100	EL, 10μF, 16V
CA14	24794470	EL, 47μF, 16V
CA15	24232103	CD, 0.01μF, +80%, −20%
CA16	24232103	CD, 0.01μF, +80%, −20%
CA17	24232103	CD, 0.01μF, +80%, −20%
CA18	24232103	CD, 0.01μF, +80%, −20%
CA19	24232103	CD, 0.01μF, +80%, −20%
CA20	24636010	EL, 1μF, 50V
CA21	24436391	CD, 390pF
CA22	24436221	CD, 220pF
CA23	24530224	PF, 0.22μF, ±10%, 63V
CA24	24530334	PF, 0.033μF, ±10%, 63V
CA25	24636229	EL, 2.2μF, 50V
CA26	24232103	CD, 0.01μF, +80%, −20%

Location No.	Part No.	Description
CA27	24232103	CD, 0.01μF, +80%, −20%
CA28	24550334	PF, 0.33μF, 63V
CA29	24232103	CD, 0.01μF, +80%, −20%
CA31	24232103	CD, 0.01μF, +80%, −20%
CA32	24794471	EL, 470μF, 16V
CA36	24550104	PF, 0.1μF, 63V
CA37	24232103	CD, 0.01μF, +80%, −20%
CA41	24636479	EL, 4.7μF, 50V
CA42	24636479	EL, 4.7μF, 50V
CB01	24212101	CD, 100pF, ±10%
CH01	24636010	EL, 1μF, 50V
CH02	24636010	EL, 1μF, 50V
CH03	24636010	EL, 1μF, 50V
CH04	24636010	EL, 1μF, 50V
CH05	24636010	EL, 1μF, 50V
CH06	24636010	EL, 1μF, 50V
CH07	24636100	EL, 10μF, 50V
CM01	24436221	CD, 220pF
CM02	24436221	CD, 220pF
CM05	24232103	CD, 0.01μF, +80%, −20%
CM06	24357270	CD, 27pF
CM07	24550563	PF, 0.056μF, 63V
CM08	24232103	CD, 0.01μF, +80%, −20%
CM10	24436270	CD, 27pF
CN02	24436150	CD, 15pF
CN07	24436360	CD, 36pF
CN09	24232103	CD, 0.01μF, +80%, −20%
CN10	24436101	CD, 100pF
CN11	24353080	CD, 8pF, ±0.25pF
CN12	24353220	CD, 22pF
CN13	24232103	CD, 0.01μF, +80%, −20%
CN16	24212102	CD, 1000pF, ±10%
CN22	24232103	CD, 0.01μF, +80%, −20%
CN51	24094959	Variable Capacitor, 2 to 12pF, 50V
CV01	24636229	EL, 2.2μF, 50V
CV03	24636100	EL, 10μF, 50V
CV04	24636229	EL, 2.2μF, 50V
CV06	24636100	EL, 10μF, 50V
CV07	24636100	EL, 10μF, 50V
CV08	24636229	EL, 2.2μF, 50V
CV10	24636100	EL, 10μF, 50V
CV11	24636229	EL, 2.2μF, 50V
CV13	24636100	EL, 10μF, 50V
CV15	24636010	EL, 1μF, 50V
CV16	24232103	CD, 0.01μF, +80%, −20%
CV17	24232103	CD, 0.01μF, +80%, −20%
CV18	24633100	EL, 10μF, 16V
CV22	24633100	EL, 10μF, 16V
CV24	24633471	EL, 470μF, 16V
CV27	24633100	EL, 10μF, 16V
CV29	24085028	EL, 2.2μF, 25V, Non-Polar
CV31	24633471	EL, 470μF, 16V
CX02	24530474	PF, 0.47μF, ±10%, 63V
CX03	24530474	PF, 0.47μF, ±10%, 63V
CX04	24530474	PF, 0.47μF, ±10%, 63V

RESISTORS

R101	24366222	CF, 2200 ohm
R102	24366124	CF, 120k ohm
R103	24366222	CF, 2200 ohm
R104	24366332	CF, 3300 ohm
R105	24366153	CF, 15k ohm
R106	24366104	CF, 100k ohm
R107	24366103	CF, 10k ohm
R108	24366102	CF, 1k ohm
R109	24366822	CF, 8200 ohm
R110	24366562	CF, 5600 ohm
R111	24366561	CF, 560 ohm
R112	24366332	CF, 3300 ohm
R113	24366132	CF, 1300 ohm
R114	24366222	CF, 2200 ohm
R115	24366101	CF, 100 ohm
R116	24366471	CF, 470 ohm
R117	24366112	CF, 1100 ohm
R118	24366470	CF, 47 ohm
R119	24366472	CF, 4700 ohm
R120	24366154	CF, 150k ohm
R121	24366331	CF, 330 ohm
R122	24366820	CF, 82 ohm
R123	24366271	CF, 270 ohm
R124	24366181	CF, 180 ohm
R125	24366331	CF, 330 ohm
R126	24366101	CF, 100 ohm
R127	24552101	OMF, 100 ohm, 1/2W
R128	24366334	CF, 330k ohm
R129	24366101	CF, 100 ohm
R130	24366513	CF, 51k ohm
R131	24366753	CF, 75k ohm
R132	24366684	CF, 680k ohm
R133	24366272	CF, 2700 ohm
R134	24366223	CF, 22k ohm
R135	24366151	CF, 150 ohm
R136	24366680	CF, 68 ohm
R137	24366103	CF, 10k ohm
R138	24366103	CF, 10k ohm
R151	24066953	VR, 5k ohm, 1/10W
R152	24066951	VR, 20k ohm, 1/10W
R153	24066946	VR, 1M ohm, 1/10W
R162	24366101	CF, 100 ohm
R163	24366472	CF, 4700 ohm
R164	24366152	CF, 1500 ohm
R165	24366562	CF, 5600 ohm
R166	24366390	CF, 39 ohm
R167	24552101	OMF, 100 ohm, 1/2W
R168	24366680	CF, 68 ohm
R169	24366682	CF, 6800 ohm
R170	24366102	CF, 1k ohm
R171	24366562	CF, 5600 ohm
R172	24366101	CF, 100 ohm
R173	24552101	OMF, 100 ohm, 1/2W
R175	24366121	CF, 120 ohm
R201	24366221	CF, 220 ohm
R202	24366101	CF, 100 ohm
R203	24366182	CF, 1800 ohm
R204	24366152	CF, 1500 ohm
R205	24366392	CF, 3900 ohm
R208	24366101	CF, 100 ohm
R209	24366103	CF, 10k ohm
R210	24366203	CF, 20k ohm
R211	24366622	CF, 6200 ohm
R212	24366103	CF, 10k ohm
R213	24366101	CF, 100 ohm
R214	24366182	CF, 1800 ohm
R215	24366152	CF, 1500 ohm
R216	24366333	CF, 33k ohm
R217	24366101	CF, 100 ohm
R218	24366472	CF, 4700 ohm

Location No.	Part No.	Description
R219	24366472	CF, 4700 ohm
R220	24366753	CF, 75k ohm
R221	24366564	CF, 560k ohm
R222	24366751	CF, 750 ohm
R223	24366103	CF, 10k ohm
R224	24366333	CF, 33k ohm
R225	24366132	CF, 1300 ohm
R226	24366104	CF, 100k ohm
R227	24366105	CF, 1M ohm
R228	24366104	CF, 100k ohm
R229	24366303	CF, 30k ohm
R230	24366102	CF, 1k ohm
R231	24366103	CF, 10k ohm
R232	24366473	CF, 47k ohm
R233	24366102	CF, 1k ohm
R234	24366223	CF, 22k ohm
R235	24366473	CF, 47k ohm
R236	24366103	CF, 10k ohm
R237	24366224	CF, 220k ohm
R241	24366101	CF, 100 ohm
R242	24366223	CF, 22k ohm
R243	24366183	CF, 18k ohm
R244	24366103	CF, 10k ohm
R245	24366103	CF, 10k ohm
R252	24066598	VR, 2k ohm, 1/10W
R253	24066598	VR, 2k ohm, 1/10W
R255	24066601	VR, 20k ohm, 1/10W
R301	24366301	CF, 300 ohm
R302	24366244	CF, 240k ohm
R303	24366303	CF, 30k ohm
R304	24366102	CF, 1k ohm
R305	24366161	CF, 160 ohm
R306	24366471	CF, 470 ohm
R309	24366102	CF, 1k ohm
R311	24552242	OMF, 2400 ohm, 1/2W
R316	24552821	OMF, 820 ohm, 1/2W
R317	24383271	OMF, 270 ohm, 2W
R318	24366183	CF, 18k ohm
R319	24381302	OMF, 3k ohm, 1/2W
R321	24366163	CF, 16k ohm
R322	24366474	CF, 470k ohm
R323	24322129	OMF, 1.2 ohm, 1W
R325	24552122	OMF, 1200 ohm, 1/2W
R327	24532130	FR, 13 ohm, 1W
R329	24552472	OMF, 4700 ohm, 1/2W
R333	24366471	CF, 470 ohm
R351	24066602	VR, 50k ohm, 1/10W
R377	24366184	CF, 180k ohm
R378	24366364	CF, 360k ohm
R380	24366153	CF, 15k ohm
R402	24366273	CF, 27k ohm
R403	24366302	CF, 3k ohm
R404	24552432	OMF, 4300 ohm, 1/2W
R405	24366511	CF, 510 ohm
R407	24366161	CF, 160 ohm
R408	24366682	CF, 6800 ohm
R411	24366391	CF, 390 ohm
R412	24366121	CF, 120 ohm
R416	24007566	Cement, 2k ohm, 5W
R419	24366510	CF, 51 ohm
R420	24009951	OMF, 1k ohm, 1W
R421	24366105	CF, 1M ohm
R423	24552221	OMF, 220 ohm, 1/2W
R440	24552103	OMF, 10k ohm, 1/2W

Location No.	Part No.	Description
R441	24552103	OMF, 10k ohm, 1/2W
R442	24383102	OMF, 1k ohm, 2W
⚠ R444	24007768	Cement, 15 ohm, 10W
R445	24552330	OMF, 33 ohm, 1/2W
⚠ R448	24983159	MF, 1.5 ohm, 1W
R451	24066601	VR, 20k ohm, 1/10W
R452	24069547	VR, 5k ohm, 0.08W
R501	24366821	CF, 820 ohm
R502	24366334	CF, 330k ohm
R503	24366202	CF, 2k ohm
R504	24366391	CF, 390 ohm
R505	24366822	CF, 8200 ohm
R507	24366822	CF, 8200 ohm
R508	24366821	CF, 820 ohm
R509	24366203	CF, 20k ohm
R510	24366101	CF, 100 ohm
R511	24366562	CF, 5600 ohm
R512	24366152	CF, 1500 ohm
R513	24366152	CF, 1500 ohm
R515	24366221	CF, 220 ohm
R516	24366221	CF, 220 ohm
R517	24366221	CF, 220 ohm
R521	24366562	CF, 5600 ohm
R522	24360185	CF, 1.8M ohm, 1/8W
R523	24366102	CF, 1k ohm
R524	24366103	CF, 10k ohm
R525	24366103	CF, 10k ohm
R526	24366122	CF, 1200 ohm
R527	24366122	CF, 1200 ohm
R529	24007642	Cement, 5600 ohm, 5W
R531	24366102	CF, 1k ohm
R532	24366242	CF, 2400 ohm
R533	24366132	CF, 1300 ohm
R534	24376104	CF, 100k ohm, 1/2W
R535	24366302	CF, 3k ohm
R536	24376104	CF, 100k ohm, 1/2W
R537	24366132	CF, 1300 ohm
R538	24366272	CF, 2700 ohm
R539	24366132	CF, 1300 ohm
R540	24376104	CF, 100k ohm, 1/2W
R541	24366821	CF, 820 ohm
R542	24366271	CF, 270 ohm
R543	24366512	CF, 5100 ohm
R544	24366101	CF, 100 ohm
R545	24366101	CF, 100 ohm
R547	24366471	CF, 470 ohm
R548	24366471	CF, 470 ohm
R549	24366471	CF, 470 ohm
R551	24066955	VR, 1k ohm, 1/10W
R557	24066598	VR, 2k ohm, 1/10W
R558	24066598	VR, 2k ohm, 1/10W
R559	24066598	VR, 2k ohm, 1/10W
R564	24366101	CF, 100 ohm
R565	24366101	CF, 100 ohm
R567	24366101	CF, 100 ohm
R570	24366103	CF, 10k ohm
R571	24366103	CF, 10k ohm
R572	24366103	CF, 10k ohm
R573	24366104	CF, 100k ohm
R591	24009957	OMF, 10k ohm, 2W
R592	24009957	OMF, 10k ohm, 2W
R593	24009957	OMF, 10k ohm, 2W
R601	24366102	CF, 1k ohm
R602	24366561	CF, 560 ohm

Location No.	Part No.	Description
R604	24366563	CF, 56k ohm
R605	24366563	CF, 56k ohm
R606	24366102	CF, 1k ohm
R607	24366102	CF, 1k ohm
R608	24366101	CF, 100 ohm
R609	24366102	CF, 1k ohm
R610	24366102	CF, 1k ohm
R611	24366102	CF, 1k ohm
R615	24366102	CF, 1k ohm
R625	24366102	CF, 1k ohm
R626	24366102	CF, 1k ohm
R627	24366103	CF, 10k ohm
R628	24366473	CF, 47k ohm
R629	24366105	CF, 1M ohm
R630	24366105	CF, 1M ohm
R631	24366562	CF, 5600 ohm
R632	24366223	CF, 22k ohm
R633	24366472	CF, 4700 ohm
R634	24366682	CF, 6800 ohm
R635	24366103	CF, 10k ohm
R660	24366102	CF, 1k ohm
R661	24366332	CF, 3300 ohm
R662	24552181	OMF, 180 ohm, 1/2W
R665	24366339	CF, 3.3 ohm
R666	24366752	CF, 7500 ohm
R668	24366152	CF, 1500 ohm
R669	24552331	OMF, 330 ohm, 1/2W
R690	24366273	CF, 27k ohm
R691	24366223	CF, 22k ohm
R692	24366104	CF, 100k ohm
R693	24366103	CF, 10k ohm
R694	24366152	CF, 1500 ohm
R695	24366222	CF, 2200 ohm
R696	24366223	CF, 22k ohm
R697	24366223	CF, 22k ohm
R698	24366472	CF, 4700 ohm
R699	24366332	CF, 3300 ohm
R801	24004914	Varistor, 5.6M ohm, 1/2W
R802	24007932	Cement, 6.2 ohm, 10W
R810	24377334	CF, 330k ohm, 1W
R814	24366823	CF, 82k ohm
R815	24366221	CF, 220 ohm
R816	24367122	CF, 1200 ohm, ±2%
R817	24321398	OMF, 0.39 ohm, 1/2W
R818	24384203	OMF, 20k ohm, 3W
R819	24366689	CF, 6.8 ohm
R820	24366102	CF, 1k ohm
R821	24007778	Cement, 180 ohm, 7W
R822	24366390	CF, 39 ohm
R823	24366822	CF, 8200 ohm, ±2%
R824	24367123	CF, 12k ohm, ±2%
R825	24531620	FR, 62 ohm, 1/2W
R826	24007552	Cement, 8200 ohm
R828	24367102	CF, 1k ohm, ±2%
R829	24382473	OMF, 47k ohm, 1W
R830	24366272	CF, 2700 ohm
R831	24366103	CF, 10k ohm
R832	24383331	OMF, 330 ohm, 2W
R836	24322228	OMF, 0.22 ohm, 1W
R837	24000900	FR, 0.47 ohm, ±10%, 1W
R838	24366392	CF, 3900 ohm
R851	24066954	VR, 2k ohm, 1/10W
R890	24000630	PTC Thermistor, Dual
R901	24946272	CC, 2700 ohm, ±10%, 1/2W

Location No.	Part No.	Description
R902	24946272	CC, 2700 ohm, ±10%, 1/2W
R903	24946272	CC, 2700 ohm, ±10%, 1/2W
R920	24000954	FR, 0.68 ohm, ±10%, 2W
RA01	24366102	CF, 1k ohm
RA02	24366102	CF, 1k ohm
RA04	24366681	CF, 680 ohm
RA05	24366101	CF, 100 ohm
RA06	24366101	CF, 100 ohm
RA07	24366101	CF, 100 ohm
RA08	24366102	CF, 1k ohm
RA09	24366103	CF, 10k ohm
RA10	24366102	CF, 1k ohm
RA11	24366472	CF, 4700 ohm
RA12	24366102	CF, 1k ohm
RA13	24366472	CF, 4700 ohm
RA14	24366102	CF, 1k ohm
RA17	24366102	CF, 1k ohm
RA19	24366103	CF, 10k ohm
RA20	24366102	CF, 1k ohm
RA21	24366102	CF, 1k ohm
RA22	24366103	CF, 10k ohm
RA23	24366471	CF, 470 ohm
RA24	24366102	CF, 1k ohm
RA25	24366103	CF, 10k ohm
RA27	24366392	CF, 3900 ohm
RA28	24366471	CF, 470 ohm
RA30	24366271	CF, 270 ohm
RA33	24366103	CF, 10k ohm
RA35	24366103	CF, 10k ohm
RA36	24366102	CF, 1k ohm
RA37	24366102	CF, 1k ohm
RA38	24366153	CF, 15k ohm
RA39	24366153	CF, 15k ohm
RA40	24366473	CF, 47k ohm
RA41	24366153	CF, 15k ohm
RA42	24366473	CF, 47k ohm
RA43	24366153	CF, 15k ohm
RA44	24366102	CF, 1k ohm
RA45	24366223	CF, 22k ohm
RA46	24366333	CF, 33k ohm
RA48	24366153	CF, 15k ohm
RA49	24366103	CF, 10k ohm
RA60	24366103	CF, 10k ohm
RA61	24360225	CF, 2.2M ohm, 1/8W
RA62	24366752	CF, 7500 ohm
RA64	24946226	CC, 22M ohm, ±10%, 1/2W
RA65	24366103	CF, 10k ohm
RA67	24366273	CF, 27k ohm
RA68	24366123	CF, 12k ohm
RA69	24366823	CF, 82k ohm
RA70	24366153	CF, 15k ohm
RA73	24366223	CF, 22k ohm
RA74	24366223	CF, 22k ohm
RA75	24366102	CF, 1k ohm
RA78	24366103	CF, 10k ohm
RA79	24366153	CF, 15k ohm
RA86	24366392	CF, 3900 ohm
RA97	24383103	OMF, 10k ohm, 2W
RB01	24366333	CF, 33k ohm
RB03	24366103	CF, 10k ohm
RB04	24366103	CF, 10k ohm
RB05	24366332	CF, 3300 ohm
RB06	24366473	CF, 47k ohm
RC06	24366222	CF, 2200 ohm

Location No.	Part No.	Description
RC08	24366222	CF, 2200 ohm
RH01	24366102	CF, 1k ohm
RH02	24366152	CF, 1500 ohm
RH03	24366102	CF, 1k ohm
RH04	24366182	CF, 1800 ohm
RH05	24366102	CF, 1k ohm
RH07	24366102	CF, 1k ohm
RH09	24366102	CF, 1k ohm
RH11	24366101	CF, 100 ohm
RH32	24366332	CF, 3300 ohm
RM03	24366182	CF, 1800 ohm
RM04	24366242	CF, 2400 ohm
RM05	24366221	CF, 220 ohm
RM06	24366471	CF, 470 ohm
RN02	24366102	CF, 1k ohm
RN05	24366392	CF, 3900 ohm
RN08	24366103	CF, 10k ohm
RN16	24366103	CF, 10k ohm
RN17	24366473	CF, 47k ohm
RN19	24366473	CF, 47k ohm
RN20	24366152	CF, 1500 ohm
RN21	24366103	CF, 10k ohm
RN22	24366152	CF, 1500 ohm
RN23	24366472	CF, 4700 ohm
RN26	24366472	CF, 4700 ohm
RN27	24366153	CF, 15k ohm
RN28	24366332	CF, 3300 ohm
RN32	24366105	CF, 1M ohm
RN44	24366152	CF, 1500 ohm
RN45	24366473	CF, 47k ohm
RN46	24366103	CF, 10k ohm
RN47	24366473	CF, 47k ohm
RN48	24366103	CF, 10k ohm
RN49	24366152	CF, 1500 ohm
RN60	24366103	CF, 10k ohm
RN61	24366103	CF, 10k ohm
RR01	24366102	CF, 1k ohm
RR06	24366471	CF, 470 ohm
RV01	24366821	CF, 820 ohm
RV02	24366102	CF, 1k ohm
RV03	24366102	CF, 1k ohm
RV05	24366101	CF, 100 ohm
RV06	24366101	CF, 100 ohm
RV07	24366102	CF, 1k ohm
RV09	24366101	CF, 100 ohm
RV10	24366102	CF, 1k ohm
RV12	24366101	CF, 100 ohm
RV13	24366103	CF, 10k ohm
RV14	24366103	CF, 10k ohm
RV15	24366101	CF, 100 ohm
RV16	24366473	CF, 47k ohm
RV17	24366473	CF, 47k ohm
RV18	24366332	CF, 3300 ohm
RV19	24366222	CF, 2200 ohm
RV20	24366101	CF, 100 ohm
RV22	24366332	CF, 3300 ohm
RV23	24366473	CF, 47k ohm
RV24	24552750	OMF, 75 ohm, 1/2W
RV25	24366331	CF, 330 ohm
RV26	24366391	CF, 390 ohm
RV27	24366473	CF, 47k ohm
RV29	24366472	CF, 4700 ohm
RV30	24366102	CF, 1k ohm
RV31	24366910	CF, 91 ohm

Location No.	Part No.	Description
RV32	24366820	CF, 82 ohm
RV33	24366332	CF, 3300 ohm
RV34	24366473	CF, 47k ohm
RV36	24366104	CF, 100k ohm
RV37	24366473	CF, 47k ohm
RV39	24366910	CF, 91 ohm
RV40	24366680	CF, 68 ohm
RV41	24366103	CF, 10k ohm
RV42	24366750	CF, 75 ohm
RV43	24366510	CF, 51 ohm
RV44	24366510	CF, 51 ohm
RV45	24366510	CF, 51 ohm
RV46	24366101	CF, 100 ohm
RV47	24366104	CF, 100k ohm
RV48	24366102	CF, 1k ohm
RV49	24366102	CF, 1k ohm
RV60	24366220	CF, 22 ohm
RV61	24366220	CF, 22 ohm
RV62	24366220	CF, 22 ohm
RV63	24366562	CF, 5600 ohm
RV64	24366562	CF, 5600 ohm
RV65	24366104	CF, 100k ohm
RV66	24366562	CF, 5600 ohm
RV67	24366562	CF, 5600 ohm
RV68	24366471	CF, 470 ohm
RV69	24366223	CF, 22k ohm
RV70	24366273	CF, 27k ohm
RV71	24366102	CF, 1k ohm
RV72	24366103	CF, 10k ohm
RV73	24366680	CF, 68 ohm
RX02	24366102	CF, 1k ohm
RX05	24366101	CF, 100 ohm
RX08	24366101	CF, 100 ohm
RX10	24366101	CF, 100 ohm
RX13	24366102	CF, 1k ohm

COILS & TRANSFORMERS

L101	23237987	Coil, Peaking, TRF4100AC
L102	23262650	Coil, IF, TRF1149D
L103	23237986	Coil, Peaking, TRF4120AC
L104	23237988	Coil, Peaking, TRF4829AC
L107	23237987	Coil, Peaking, TRF4100AC
L151	23262668	Coil, IF, TRF1162T
L152	23262663	Coil, IF, TRF1157T
L153	23262813	Coil, IF, TRF1077D
L161	23261986	Coil, RF Choke, TRF9220
L162	23261985	Coil, RF Choke, TRF9221
L163	23262729	Coil, IF, TRF1143D
L201	23237974	Coil, Peaking, TRF4121AC
L311	23261974	Coil, Choke, HC5-035
L315	23289100	Coil, Peaking, TRF4100AC
L405	23221739	Coil, Choke, TRF9252D
L406	23103859	Coil (Ferrite Bead), TEM2011
L411	23233065	Coil, Linearity, TLN2111
L441	23238934	Coil, Peaking, TRF4109AC
⚠ L462	23227339	Deflection Yoke, 4700-2
L503	23237987	Coil, Peaking, TRF4100AC
L551	23250972	Coil, 1H-Delay Matching, TRF5418D
L601	23262835	Coil, PIF, TRF1058D
L604	23237986	Coil, Peaking, TRF4120AC
L651	23232942	Coil, Variable, TRF3077
L652	23232942	Coil, Variable, TRF3077
L801	23221050	Coil, RF Choke, TLN1015

Location No.	Part No.	Description
L802	23103859	Coil (Ferrite Bead), TEM2011
L803	23261975	Coil, Choke, TRF9229
L804	23261975	Coil, Choke, TRF9229
L805	23222694	Coil, Width, TLN2026
L806	23103859	Coil (Ferrite Bead), TEM2011
L807	23222694	Coil, Width, TLN2026
⚠ L901	23200779	Coil, Degaussing, TSB-2231
LA01	23238934	Coil, Peaking, TRF4109AC
LA02	23221685	Coil, Choke, TLN3193
LB01	23262778	Coil, IF, TRF1112
LM01	23262797	Coil, IF, TRF1093D
LM02	23250865	Coil, IF, TRF5414DA
LM03	23250865	Coil, IF, TRF5414DA
LM04	23262798	Coil, IF, TRF1092D
LN02	23237985	Coil, Peaking, TRF4150AC
⚠ T401	23224983	Transformer, Horiz. Drive, TLN1039
⚠ T461	23236245	Transformer, Flyback, AT2079/21
T801	23211961	Line Filter, TRF3118
⚠ T803	23217074	Transformer, Converter, 47003593

SEMICONDUCTORS

IC101	23318437	IC, μPC1820CA
IC303	23119548	IC, AN5515
IC408	23318218	IC, μPC7812H
IC601	23318390	IC, TDA4480-2
IC660	23318392	IC, AN5262
IC661	23119668	IC, TDA2611A
IC801	23318232	IC, TDA4601
IC807	23318299	IC, L78MR05-FA
ICA01	23318480	IC, M34300M4-580
ICA02	23318482	IC, M6M80011AP
ICA04	23119441	IC, LA7910
ICH01	23119139	IC, AN5862K
ICV01	B0383505	IC, TA8720AN
Q102	23114691	Transistor, BC557A
Q103	23118980	Transistor, BC337
Q104	23114689	Transistor, BC547A
Q161	A6708871	Transistor, 2SC388ATM
Q162	A6708871	Transistor, 2SC388ATM
Q163	A6708871	Transistor, 2SC388ATM
Q201	23114689	Transistor, BC547A
Q202	23114691	Transistor, BC557A
Q203	23114689	Transistor, BC547A
Q204	A6041876	Transistor, 2SK117-GR FA-2
Q205	A6342200	Transistor, 2SC2878-A
Q206	23114689	Transistor, BC547A
Q208	23114689	Transistor, BC547A
Q303B	23035308	Screw, BTB3X8SZN
Q363	23114689	Transistor, BC547A
Q402	A6330069	Transistor, 2SC2482 FA-1
⚠ Q404	23314375	Transistor, ON4409
Q406	23314229	Transistor, 2SD1378-Q
Q501	B0379475	Transistor, A8659AN
Q502	23114691	Transistor, BC557A
Q503	23114691	Transistor, BC557A
Q505	23114693	Transistor, BF871
Q506	23114689	Transistor, BC547A
Q507	23114693	Transistor, BF871
Q508	23114689	Transistor, BC547A
Q509	23114693	Transistor, BF871
Q510	23114689	Transistor, BC547A

Location No.	Part No.	Description
Q514	23114688	Transistor, BC327
Q516	23114689	Transistor, BC547A
Q602	23114689	Transistor, BC547A
Q603	23114689	Transistor, BC547A
Q604	A6041876	Transistor, 2SK117-GR FA-2
Q605	A6041876	Transistor, 2SK117-GR FA-2
Q606	23114689	Transistor, BC547A
Q607	23114689	Transistor, BC547A
Q697	23114689	Transistor, BC547A
Q698	A6342200	Transistor, 2SC2878-A
Q699	23114691	Transistor, BC557A
Q802	23314376	Transistor, ON4409
Q803	23314246	Transistor, 2SC2023 LF-4
Q804	A6547303	Transistor, 2SA1321
Q805	A6325067	Transistor, 2SC2230A-Y
Q806	23114546	Transistor, BC557B
QA05	23114689	Transistor, BC547A
QA06	23114689	Transistor, BC547A
QA07	23114689	Transistor, BC547A
QA09	23114691	Transistor, BC557A
QA10	23114689	Transistor, BC547A
QA11	23114546	Transistor, BC557B
QB01	23114689	Transistor, BC547A
QB02	23114689	Transistor, BC547A
QH03	23114689	Transistor, BC547A
QH04	23114689	Transistor, BC547A
QH05	23114689	Transistor, BC547A
QN08	23114689	Transistor, BC547A
QN09	23114689	Transistor, BC547A
QN11	A6041876	Transistor, 2SK117-GR FA-2
QN15	23114689	Transistor, BC547A
QN16	23114689	Transistor, BC547A
QV02	23114691	Transistor, BC557A
QV03	23114689	Transistor, BC547A
QV05	23114689	Transistor, BC547A
QV06	23114689	Transistor, BC547A
QV07	23114689	Transistor, BC547A
QV09	23114632	Transistor, BC547B
QV10	23114689	Transistor, BC547A
QV11	A6342200	Transistor, 2SC2878-A
D201	23115599	Diode, 1N4148
D202	23115599	Diode, 1N4148
D241	A7150041	Diode, 1SS104
D302	23118479	Diode, BYD33J
D305	23118479	Diode, BYD33J
D314	A7117205	Diode, Zener, 04AZ12X
D315	A7116715	Diode, Zener, 04AZ7.5Y
D367	23115599	Diode, 1N4148
D401	A7116925	Diode, Zener, 04AZ9.1Z
D402	A7117715	Diode, Zener, 04AZ20Y
D403	A7117215	Diode, Zener, 04AZ12Y
D406	23118479	Diode, BYD33J
D408	23118052	Diode, RU4Z
D409	A7117015	Diode, Zener, 04AZ10Y
D410	A7116815	Diode, Zener, 04AZ8.2Y
D593	23115599	Diode, 1N4148
D594	23115599	Diode, 1N4148
D595	23115599	Diode, 1N4148
D601	23115599	Diode, 1N4148
D660	23115599	Diode, 1N4148
D695	23115599	Diode, 1N4148
D696	23115599	Diode, 1N4148
D697	23115599	Diode, 1N4148
D698	23115599	Diode, 1N4148

Location No.	Part No.	Description
D699	23115599	Diode, 1N4148
D803	23118173	Diode, RBV-406M-LFA
D805	23118479	Diode, BYD33J
D806	23118479	Diode, BYD33J
D807	23118479	Diode, BYD33J
D808	23118736	Diode, BYV96E
D809	23118451	Diode, RU4A
D810	23118479	Diode, BYD33J
D811	23118479	Diode, BYD33J
D812	A7116515	Diode, Zener, 04AZ6.2Y
DA13	23115599	Diode, 1N4148
DA14	23115599	Diode, 1N4148
DA15	23115599	Diode, 1N4148
DA16	23115599	Diode, 1N4148
DA17	23115599	Diode, 1N4148
DA20	23115599	Diode, 1N4148
DA21	23115599	Diode, 1N4148
DA22	23115599	Diode, 1N4148
DA27	23115599	Diode, 1N4148
DA28	23115599	Diode, 1N4148
DA30	23115878	Diode, Zener, μPC574J(L)
DA31	23115599	Diode, 1N4148
DA33	23115599	Diode, 1N4148
DE40	23118969	Diode (LED), MV57124, Red
DE41	23318436	Diode (LED), MV53124A, Yellow
DH01	23115599	Diode, 1N4148
DH02	23115599	Diode, 1N4148
DH03	23115599	Diode, 1N4148
DH04	23115599	Diode, 1N4148
DH05	23115599	Diode, 1N4148
DH06	23115599	Diode, 1N4148
DH07	A7116215	Diode, Zener, 04AZ4.7Y
DN02	23115599	Diode, 1N4148
DN04	A7288601	Diode, 1S2186 FA-1
DN05	A7116305	Diode, Zener, 04AZ5.1X
DN06	A7288601	Diode, 1S2186 FA-1
DN07	A7288601	Diode, 1S2186 FA-1
DN11	A7288601	Diode, 1S2186 FA-1
DN12	A7288601	Diode, 1S2186 FA-1
DV01	A7116915	Diode, Zener, 04AZ9.1Y
DV02	23115599	Diode, 1N4148
DV03	A7116215	Diode, Zener, 04AZ4.7Y

MISCELLANEOUS

B204	23848140	Holder
⚠ F801	23144896	Fuse, 2.0A
F801A	23165102	Fuse Holder
K901	23120370	Remote Sensor, IR-9107-K
P661	23365430	Earphone Jack
⚠ P801	23176697	Power Cord
PH01	23365598	21 Pin Connector
PH02	23365598	21 Pin Connector
PV01	23365515	Jack, 4P
PV02	23365428	Jack Phono, 2P
S202	23145542	Switch, Lever, 1C3P
S301	23145682	Switch, Lever, 1C3P
⚠ S801	23145434	Switch, Power, 2C2P
SA01	23145430	Switch, Push, 1C1P
SA02	23145430	Switch, Push, 1C1P
SA03	23145430	Switch, Push, 1C1P
SA04	23145430	Switch, Push, 1C1P
⚠ V901A	23902353	Socket, CRT, 10P
W201	23250907	Delay Line, TRF2075

Location No.	Part No.	Description
W661	23151199	Speaker, SPK-1267, 60x70mm, 8 ohm
X401	23153886	Crystal, 4.43MHz
X501	23153979	Crystal, 4.43MHz
X502	23250950	Coil, 1H-Delay Line, DL711
Z101	A5613171	PIF SAW Filter, F1038D
Z102	23153725	Ceramic Resonator, TCR1043
Z103	23107911	Ceramic Video Trap, 5.5 to 6MHz, TCF1019
Z104	23107658	Ceramic Video Trap, 5.74MHz, TCF1052
Z201	23107972	Ceramic Video Trap, 5.5MHz, TPS5.5MB
Z602	A5613023	SIF SAW Filter, F328BM
Z603	23107948	Ceramic Filter, 6.0MHz, SFE6.0MBF
Z604	23107855	Ceramic Filter, 5.5MHz, TCF1031
ZA01	23153741	Ceramic Resonator, TCR1029
ZA02	24000766	Resistor Block, 10k ohmx4, 1/8W
ZA03	24094651	Capacitor Block, 100pFx4, 50V
ZV01	23107849	Ceramic Video Trap, 4.43MHz, TCF1032

PC BOARD ASSEMBLIES

U101A	23336473	PIF Board, PB0014-1
U101B	23336504	SIF Board, PB0014-2
U101C	23336505	A/V Board, PB0014-3
U101D	23336506	H/P Board, PB0014-4
U902A	23336507	Main Board, PB0015
U903A	23336508	CRT Drive Board, PB0016-1
U903B	23336509	Power Board, PB0016-2

PICTURE TUBE

⚠ V901	23312144	Picture Tube, A51EBV12K

TUNER

H0[illegible]	23121562	Tuner, VHF/UHF, EF442X1

REMOTE HAND SET PARTS

K902	23120387	Remote Hand Unit, CT-9455
AT01	23304431	Upper Case
AT02	23300919	Lower Case
AT03	23300920	Battery Cover
AT04	23300921	Filter
ST01	23304432	Rubber Sheet
UT01	23336217	PC Board, PW9933
ZT01	23153736	Ceramic Resonator, CSB455EB20

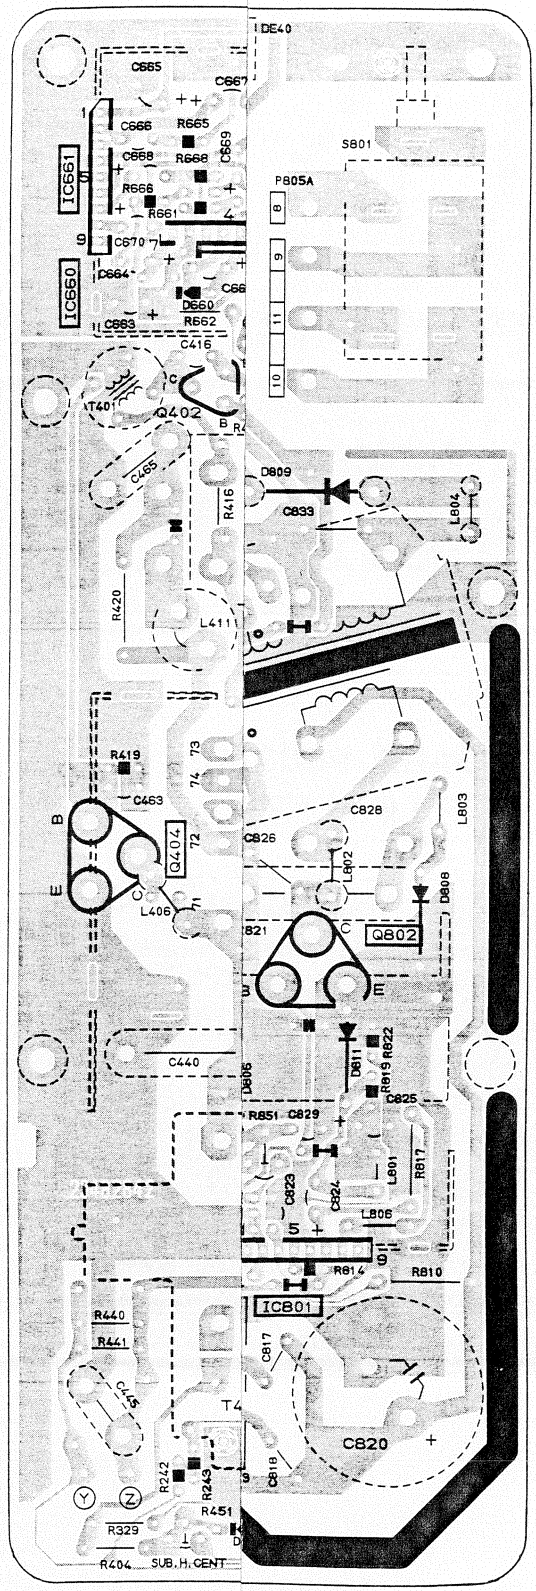
DE40
C665
C667
C666
R665
C668
R668
C669
R666
R661
C670
D664
C663
D660
R662
IC661
IC660
S801
P805A
C416
T401
Q402
C465
R416
D809
C833
L804
R420
L411
R419
C463
Q404
L406
C828
C826
L803
L802
D808
Q802
C821
C440
D806
D811
R819
R822
C825
R851
C829
C823
C824
L801
R817
L806
R814
R810
IC801
R440
R441
C817
T4
C820
C818
R242
R243
R451
R329
R404
SUB. H. CENT

PIF BOARD PB0014-1

BOTTOM (FOIL) SIDE

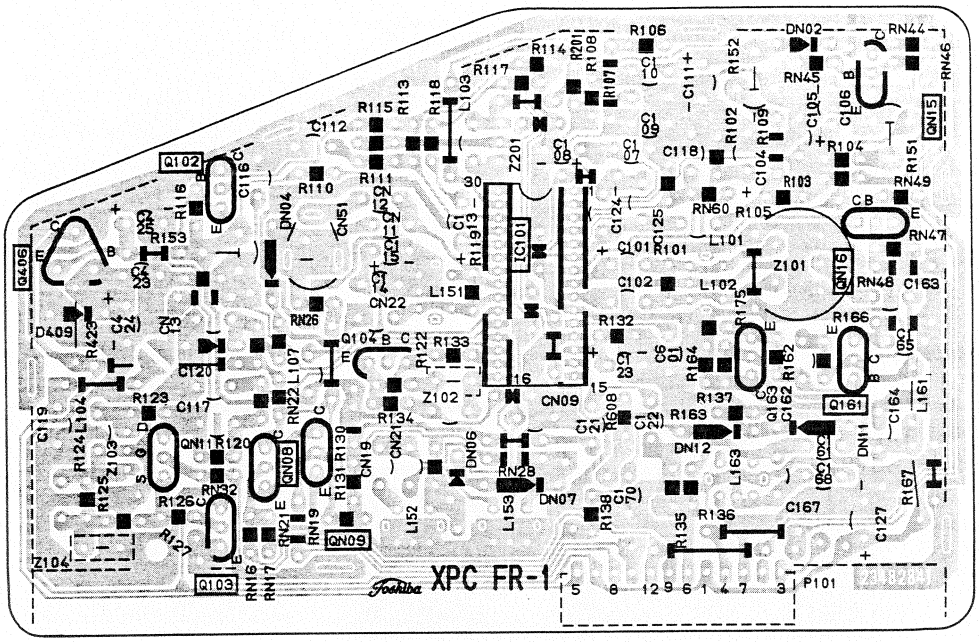

SIF BOARD PB0014-2

BOTTOM (FOIL) SIDE

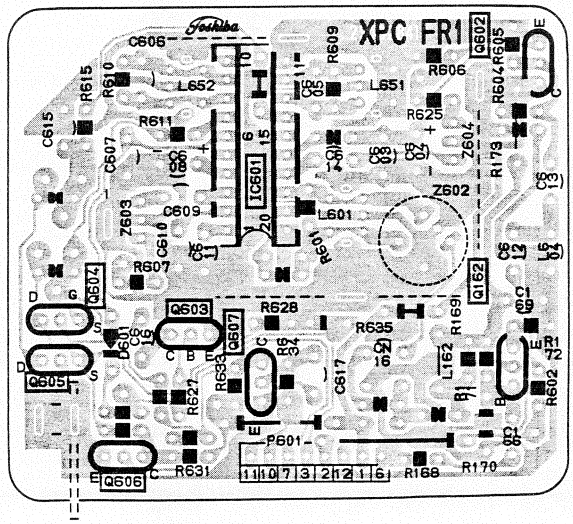

A/V SW BOARD PB0014-3

BOTTOM (FOIL) SIDE

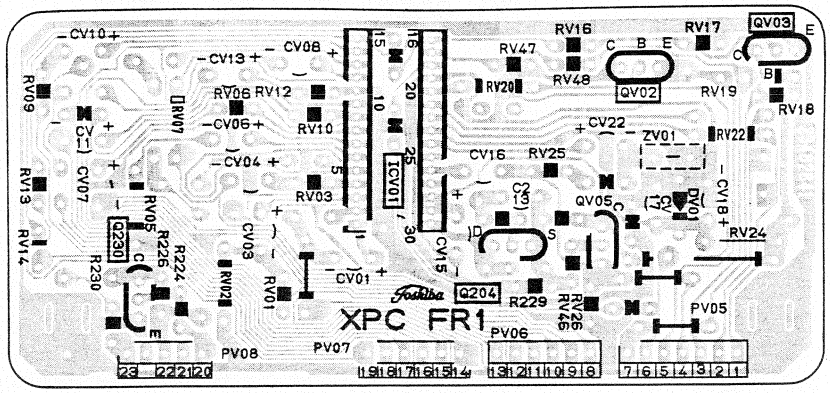

H/P BOARD PB0014-4

BOTTOM (FOIL) SIDE

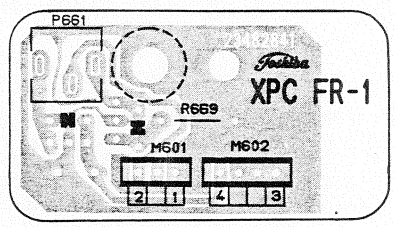

TERMINAL VIEW OF TRANSISTORS

① BC327
BC337
BC547A
BC547B
BC547C
BC557A
BC557B
BC556A



② 2SK30ATM
2SK117

③ BD202



④ BF871
2SD553
2SC1569



⑤ 2SC3678
2SC3182N



⑥ 2SD1427
2SD1432



⑦ 2SC2482
2SA1321
2SC2230
2SA1020
2SC2655
2SC752GTM



⑧ 2SC388ATM
2SA1015
2SC1959
2SA562TM



⑨ 2SD1548



⑩ 2SC2



⑪ ON4409



2100RFT

SCHEMATIC DIAGRAM (1/2)

IMPORTANT SAFETY NOTICE

Component marked with the International Hazard Symbol must, if changed, be replaced by an approved type and must be mounted as the original. This will ensure that the safety standards adhered to during manufacture will be maintained following any servicing procedure.

OBSERVATION OF VOLTAGES AND WAVEFORMS

1. Voltage readings were obtained using a high impedance digital voltmeter.
2. (—) or ground lead of instruments should be connected to the ground marked (⊥) in the shematic on checking Non-isolated circuit surrounded by mark but should be connected to the points marked (⏚) on checking isolated circuit.
3. The voltage readings may vary as much as ±20%.
4. Check that the Tuning, A.F.C., Brightness, Contrast and Colour controls are adjusted for the best picture, making sure that the Contrast,Brightness and Colour controls are set near to their mid-positions.
5. The waveforms were taken using a standard colour bar signal and were observed using a wide band oscilloscope via a low capacity probe.

NOTES:

1. This circuit diagram is subject to change without notice.

EXPRESSION

VALUE OF RESISTOR, CAPACITOR and INDUCTOR

1. Resistance is shown in ohm, k=1,000, M=1,000,000.
2. Unless otherwise noted in schematic, all capacitor values less than 1 are expressed in μF and the values more than 1 in pF.
3. Unless otherwise noted in schematic, all inductor values more than 1 are expressed in μH, and the values less than 1 in H.

GROUNDING SYMBOL

1. ⊥: Non isolated ground, ⏚ : Isolated ground.

RESISTORS

Prefixed to values:

TYPE
Carbon Comp
Oxide Metal Fi
Ins. Carbon Fi
Wire Wound
Cement covered
Fusible Res.

1	AUDIO OUT(R)
2	AUDIO IN(R)
3	AUDIO OUT(L)
4	AUDIO EARTH
5	EARTH
6	AUDIO IN(L)
7	BLUE IN
8	EXT/TV
9	GREEN EARTH
10	NC
11	GREEN IN

12	NC
13	RED EARTH
14	NC
15	RED IN
16	RAPID BLANKING
17	VIDEO EARTH
18	RAPID BLK EARTH
19	VIDEO OUT
20	VIDEO IN
21	SHIELD EARTH

U101D H/P
BOARD PB0014-4

U902 MAIN BOARD

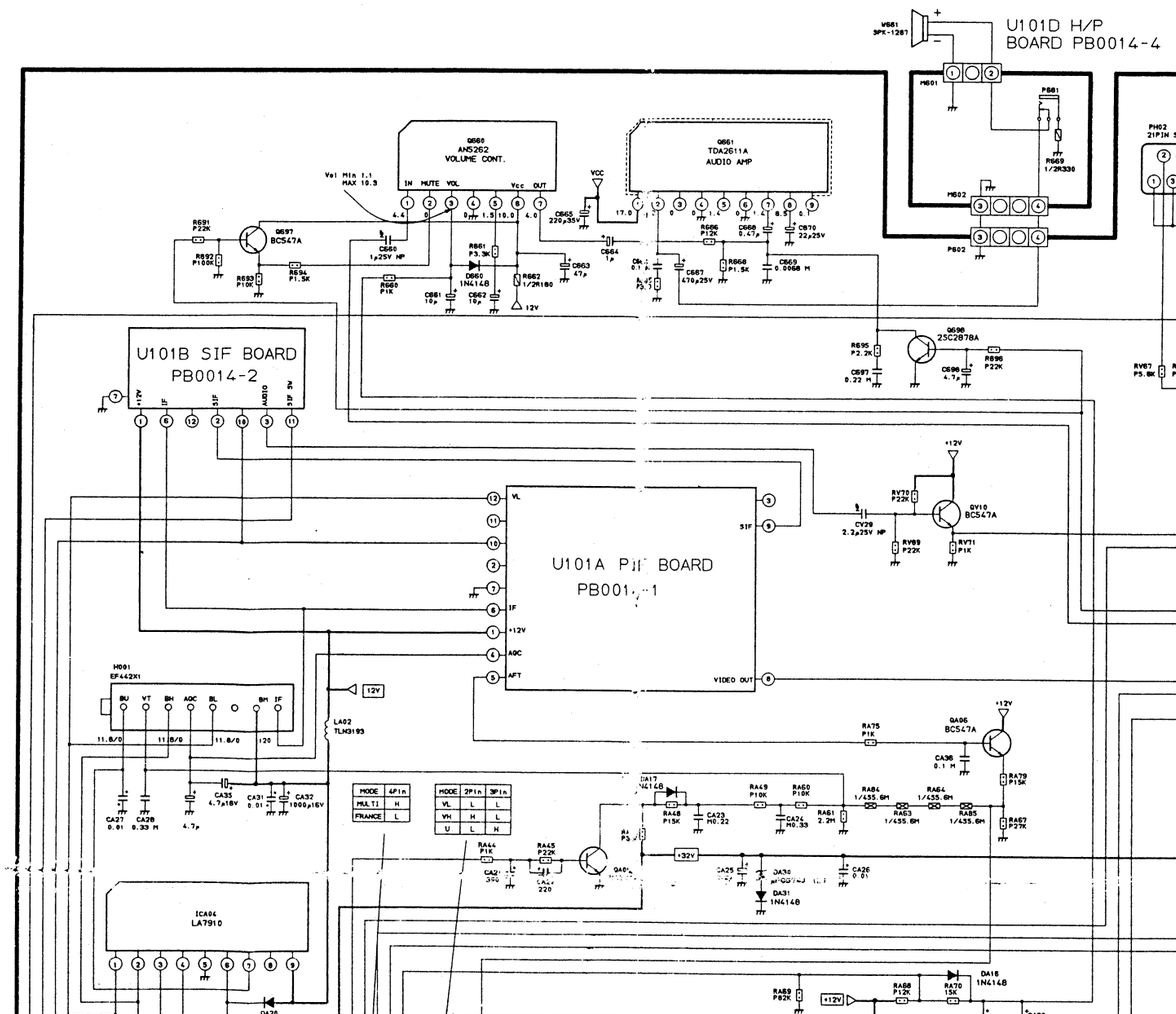

U101C A/V SW.BOARD PB0014-3

ICA04 M34300-580SP

ICA94 LA7910

IC801 TDA4601

QV01 TA8720AN

MODE	4Pin
PAL TI	H
FINANCE	L

MODE	2Pin	3Pin
VL	L	L
VH	H	L
U	L	H

PIN	QV01	
MODE	15	16
TV	H	HILI
VIDEO1	H	L
VIDEO2	L	L
VIDEO3	L	H

K901 IR-9103K REMOTE SENSOR

POWER IND DE49 MV57124(RED)

SA01 POSI UP
SA02 POSI DN
SA03 VOL UP
SA04 VOL DN

SB01 POWER SW

TO POWER BOARD

TO POWER BOARD

⚠ T803 CONVERTER TRANS.

n 1 are expressed in

n 1 are expressed in

RESISTORS

Prefixed to values:

TYPE	MARK
Carbon Comp.	S
Oxide Metal Film	R
Ins. Carbon Film	P
Wire Wound	W
Cement covered W.W.	NO MARK
Fusible Res.	FR

Suffixes to values:

TOLERANCE	MARK
±1%	(F)
±2%	(G)

Suffixes to VR values:

LAW	MARK
Linear	(B)
'C' Curve Characteristic	(C)

Rating Markings:

WATTAGE	MARK
1/6W	
1/4W	
1/2W	
1W	1
2W	2

WATTAGE	MARK
3W	3
5W	5
10W	10
15W	15
20W	20
25W	25

CAPACITORS

Rating Markings:

Type	Mark
Ceramic Disc 50V Only	
Electrolytic	
Electrolytic Non-Polar	
Variable Capacitor	
Other	

U902 MAIN BOARD PB0015

A/V SW.BOARD PB0014-3
2.3Vp-p
1.2Vp-p
1.6Vp-p
0.95Vp-p
0.6Vp-p
5Vp-p
5Vp-p
5Vp-p
2Vp-p(H)
SUB BRIGHT
+12V
+12V
+12V

A/V SW.BOARD PB0014-3

IC581 TA8659AN

VIDEO AMP
TX CONT
SRT.BLK.CRAMP
C-Y AMP
Q-Y MAT
TV/TX 3V
FORCED STANDARD SET.
SYSTEM CONTROL SCANNING
H.V I²L
DE AMP&5V
BURST AMP
DEMO
R-Y MATRIX BEAM PEAKU
CHROMA AMP
IDENT
APC
CHROMA VCO
VERT
COLOUR
H. OUT
AFC
32fH OSC
SYNC SEP.

Q201 BC547A
Q205 2SC2878A
Q206 BC547A
Q503 BC557A
Q502 BC557A
Q501 BC557A
Q504 2SK117GR
QV01 TA8720AN
QV05 BC547A
QV92 BC557A
QV93 BC547A
Q399 BC557A
Q803 2SC2023(LF-4)
Q806 BC557B
Q804 2SA1321
Q805 2SC2230A-Y
Q807 L78MR05
Q402 2SC2482(FA-1) HOR DRIVE
Q303 AN5515 Y.OUT
Q408 μPC7812H
Q404 ON4409 HOR OUT
T401 TLN1039 HOR.DRIVE
T803 CONVERTER TRANS.
T481 AT2079/21 HOR.OUTPUT TRANS
D401 04AZ9.1Z
D410 04AZ8.2Y
D402 04AZ20Y
D403 04AZ12Y
D214 04AZ12X
D315 04AZ7.5Y
D408 BY033J
D241 1SS104FA
D899 1N4148
D898 1N4148
D367 1N4148
D810 BY033J
D809 RU4A
D305 BY033J
D392 BY033J
D408 RU4Z
D241 1SS104FA
L581 TRF5418D
L582 TRF5414AD
L583 TRF5414AD
L584 TRF9229
L807 TLN2026
L805 TLN2026
L803 TRF9229
L408 TEM2011
L403 TRF9252D
L411 TLN2110
L311 HCS-635
LH01 TRF1093D
LH02 TRF5414AD
LH03 TRF5414AD
LH04 TRF1092D
LH05 TRF5414AD
LH02 PL-15
LH03 PL-15
L441 PL-1
L201 PL-120
W201 TRF-2075
X581 4.43M
X582 DL711
X601 503K
RV01 4.4AZ9.1Y
RV02 TLN2026
RV03 TLN2026
RV04 TLN2026
RV05 TLN2026
RV06 TLN2026
RV07 TLN2026
RV08 TLN2026
RV09 TLN2026
RV10 TLN2026
RV11 TLN2026
RV12 TLN2026
RV13 TLN2026
RV14 TLN2026
RV15 TLN2026
RV16 TLN2026
RV17 TLN2026
RV18 TLN2026
RV19 TLN2026
RV20 TLN2026
RV21 TLN2026
RV22 TLN2026
RV23 TLN2026
RV24 TLN2026
RV25 TLN2026
RV26 TLN2026
RV27 TLN2026
RV28 TLN2026
RV29 TLN2026
RV30 TLN2026
RV31 TLN2026
RV32 TLN2026
RV33 TLN2026
RV34 TLN2026
RV35 TLN2026
RV36 TLN2026
RV37 TLN2026
RV38 TLN2026
RV39 TLN2026
RV40 TLN2026
RV41 TLN2026
RV42 TLN2026
RV43 TLN2026
RV44 TLN2026
RV45 TLN2026
RV46 TLN2026
RV47 TLN2026
RV48 TLN2026
RV49 TLN2026
RV50 TLN2026
RV51 TLN2026
RV52 TLN2026
RV53 TLN2026
RV54 TLN2026
RV55 TLN2026
RV56 TLN2026
RV57 TLN2026
RV58 TLN2026
RV59 TLN2026
RV60 TLN2026
RV61 TLN2026
RV62 TLN2026
RV63 TLN2026
RV64 TLN2026
RV65 TLN2026
RV66 TLN2026
RV67 TLN2026
RV68 TLN2026
RV69 TLN2026
RV70 TLN2026
RV71 TLN2026
RV72 TLN2026
RV73 TLN2026
RV74 TLN2026
RV75 TLN2026
RV76 TLN2026
RV77 TLN2026
RV78 TLN2026
RV79 TLN2026
RV80 TLN2026
RV81 TLN2026
RV82 TLN2026
RV83 TLN2026
RV84 TLN2026
RV85 TLN2026
RV86 TLN2026
RV87 TLN2026
RV88 TLN2026
RV89 TLN2026
RV90 TLN2026
RV91 TLN2026
RV92 TLN2026
RV93 TLN2026
RV94 TLN2026
RV95 TLN2026
RV96 TLN2026
RV97 TLN2026
RV98 TLN2026
RV99 TLN2026
RV100 TLN2026
RV101 TLN2026
RV102 TLN2026
RV103 TLN2026
RV104 TLN2026
RV105 TLN2026
RV106 TLN2026
RV107 TLN2026
RV108 TLN2026
RV109 TLN2026
RV110 TLN2026
RV111 TLN2026
RV112 TLN2026
RV113 TLN2026
RV114 TLN2026
RV115 TLN2026
RV116 TLN2026
RV117 TLN2026
RV118 TLN2026
RV119 TLN2026
RV120 TLN2026
RV121 TLN2026
RV122 TLN2026
RV123 TLN2026
RV124 TLN2026
RV125 TLN2026
RV126 TLN2026
RV127 TLN2026
RV128 TLN2026
RV129 TLN2026
RV130 TLN2026
RV131 TLN2026
RV132 TLN2026
RV133 TLN2026
RV134 TLN2026
RV135 TLN2026
RV136 TLN2026
RV137 TLN2026
RV138 TLN2026
RV139 TLN2026
RV140 TLN2026
RV141 TLN2026
RV142 TLN2026
RV143 TLN2026
RV144 TLN2026
RV145 TLN2026
RV146 TLN2026
RV147 TLN2026
RV148 TLN2026
RV149 TLN2026
RV150 TLN2026
RV151 TLN2026
RV152 TLN2026
RV153 TLN2026
RV154 TLN2026
RV155 TLN2026
RV156 TLN2026
RV157 TLN2026
RV158 TLN2026
RV159 TLN2026
RV160 TLN2026
RV161 TLN2026
RV162 TLN2026
RV163 TLN2026
RV164 TLN2026
RV165 TLN2026
RV166 TLN2026
RV167 TLN2026
RV168 TLN2026
RV169 TLN2026
RV170 TLN2026
RV171 TLN2026
RV172 TLN2026
RV173 TLN2026
RV174 TLN2026
RV175 TLN2026
RV176 TLN2026
RV177 TLN2026
RV178 TLN2026
RV179 TLN2026
RV180 TLN2026
RV181 TLN2026
RV182 TLN2026
RV183 TLN2026
RV184 TLN2026
RV185 TLN2026
RV186 TLN2026
RV187 TLN2026
RV188 TLN2026
RV189 TLN2026
RV190 TLN2026
RV191 TLN2026
RV192 TLN2026
RV193 TLN2026
RV194 TLN2026
RV195 TLN2026
RV196 TLN2026
RV197 TLN2026
RV198 TLN2026
RV199 TLN2026
RV200 TLN2026
RV201 TLN2026
RV202 TLN2026
RV203 TLN2026
RV204 TLN2026
RV205 TLN2026
RV206 TLN2026
RV207 TLN2026
RV208 TLN2026
RV209 TLN2026
RV210 TLN2026
RV211 TLN2026
RV212 TLN2026
RV213 TLN2026
RV214 TLN2026
RV215 TLN2026
RV216 TLN2026
RV217 TLN2026
RV218 TLN2026
RV219 TLN2026
RV220 TLN2026
RV221 TLN2026
RV222 TLN2026
RV223 TLN2026
RV224 TLN2026
RV225 TLN2026
RV226 TLN2026
RV227 TLN2026
RV228 TLN2026
RV229 TLN2026
RV230 TLN2026
RV231 TLN2026
RV232 TLN2026
RV233 TLN2026
RV234 TLN2026
RV235 TLN2026
RV236 TLN2026
RV237 TLN2026
RV238 TLN2026
RV239 TLN2026
RV240 TLN2026
RV241 TLN2026
RV242 TLN2026
RV243 TLN2026
RV244 TLN2026
RV245 TLN2026
RV246 TLN2026
RV247 TLN2026
RV248 TLN2026
RV249 TLN2026
RV250 TLN2026
RV251 TLN2026
RV252 TLN2026
RV253 TLN2026
RV254 TLN2026
RV255 TLN2026
RV256 TLN2026
RV257 TLN2026
RV258 TLN2026
RV259 TLN2026
RV260 TLN2026
RV261 TLN2026
RV262 TLN2026
RV263 TLN2026
RV264 TLN2026
RV265 TLN2026
RV266 TLN2026
RV267 TLN2026
RV268 TLN2026
RV269 TLN2026
RV270 TLN2026
RV271 TLN2026
RV272 TLN2026
RV273 TLN2026
RV274 TLN2026
RV275 TLN2026
RV276 TLN2026
RV277 TLN2026
RV278 TLN2026
RV279 TLN2026
RV280 TLN2026
RV281 TLN2026
RV282 TLN2026
RV283 TLN2026
RV284 TLN2026
RV285 TLN2026
RV286 TLN2026
RV287 TLN2026
RV288 TLN2026
RV289 TLN2026
RV290 TLN2026
RV291 TLN2026
RV292 TLN2026
RV293 TLN2026
RV294 TLN2026
RV295 TLN2026
RV296 TLN2026
RV297 TLN2026
RV298 TLN2026
RV299 TLN2026
RV300 TLN2026
RV301 TLN2026
RV302 TLN2026
RV303 TLN2026
RV304 TLN2026
RV305 TLN2026
RV306 TLN2026
RV307 TLN2026
RV308 TLN2026
RV309 TLN2026
RV310 TLN2026
RV311 TLN2026
RV312 TLN2026
RV313 TLN2026
RV314 TLN2026
RV315 TLN2026
RV316 TLN2026
RV317 TLN2026
RV318 TLN2026
RV319 TLN2026
RV320 TLN2026
RV321 TLN2026
RV322 TLN2026
RV323 TLN2026
RV324 TLN2026
RV325 TLN2026
RV326 TLN2026
RV327 TLN2026
RV328 TLN2026
RV329 TLN2026
RV330 TLN2026
RV331 TLN2026
RV332 TLN2026
RV333 TLN2026
RV334 TLN2026
RV335 TLN2026
RV336 TLN2026
RV337 TLN2026
RV338 TLN2026
RV339 TLN2026
RV340 TLN2026
RV341 TLN2026
RV342 TLN2026
RV343 TLN2026
RV344 TLN2026
RV345 TLN2026
RV346 TLN2026
RV347 TLN2026
RV348 TLN2026
RV349 TLN2026
RV350 TLN2026
RV351 TLN2026
RV352 TLN2026
RV353 TLN2026
RV354 TLN2026
RV355 TLN2026
RV356 TLN2026
RV357 TLN2026
RV358 TLN2026
RV359 TLN2026
RV360 TLN2026
RV361 TLN2026
RV362 TLN2026
RV363 TLN2026
RV364 TLN2026
RV365 TLN2026
RV366 TLN2026
RV367 TLN2026
RV368 TLN2026
RV369 TLN2026
RV370 TLN2026
RV371 TLN2026
RV372 TLN2026
RV373 TLN2026
RV374 TLN2026
RV375 TLN2026
RV376 TLN2026
RV377 TLN2026
RV378 TLN2026
RV379 TLN2026
RV380 TLN2026
RV381 TLN2026
RV382 TLN2026
RV383 TLN2026
RV384 TLN2026
RV385 TLN2026
RV386 TLN2026
RV387 TLN2026
RV388 TLN2026
RV389 TLN2026
RV390 TLN2026
RV391 TLN2026
RV392 TLN2026
RV393 TLN2026
RV394 TLN2026
RV395 TLN2026
RV396 TLN2026
RV397 TLN2026
RV398 TLN2026
RV399 TLN2026
RV400 TLN2026
RV401 TLN2026
RV402 TLN2026
RV403 TLN2026
RV404 TLN2026
RV405 TLN2026
RV406 TLN2026
RV407 TLN2026
RV408 TLN2026
RV409 TLN2026
RV410 TLN2026
RV411 TLN2026
RV412 TLN2026
RV413 TLN2026
RV414 TLN2026
RV415 TLN2026
RV416 TLN2026
RV417 TLN2026
RV418 TLN2026
RV419 TLN2026
RV420 TLN2026
RV421 TLN2026
RV422 TLN2026
RV423 TLN2026
RV424 TLN2026
RV425 TLN2026
RV426 TLN2026
RV427 TLN2026
RV428 TLN2026
RV429 TLN2026
RV430 TLN2026
RV431 TLN2026
RV432 TLN2026
RV433 TLN2026
RV434 TLN2026
RV435 TLN2026
RV436 TLN2026
RV437 TLN2026
RV438 TLN2026
RV439 TLN2026
RV440 TLN2026
RV441 TLN2026
RV442 TLN2026
RV443 TLN2026
RV444 TLN2026
RV445 TLN2026
RV446 TLN2026
RV447 TLN2026
RV448 TLN2026
RV449 TLN2026
RV450 TLN2026
RV451 TLN2026
RV452 TLN2026
RV453 TLN2026
RV454 TLN2026
RV455 TLN2026
RV456 TLN2026
RV457 TLN2026
RV458 TLN2026
RV459 TLN2026
RV460 TLN2026
RV461 TLN2026
RV462 TLN2026
RV463 TLN2026
RV464 TLN2026
RV465 TLN2026
RV466 TLN2026
RV467 TLN2026
RV468 TLN2026
RV469 TLN2026
RV470 TLN2026
RV471 TLN2026
RV472 TLN2026
RV473 TLN2026
RV474 TLN2026
RV475 TLN2026
RV476 TLN2026
RV477 TLN2026
RV478 TLN2026
RV479 TLN2026
RV480 TLN2026
RV481 TLN2026
RV482 TLN2026
RV483 TLN2026
RV484 TLN2026
RV485 TLN2026
RV486 TLN2026
RV487 TLN2026
RV488 TLN2026
RV489 TLN2026
RV490 TLN2026
RV491 TLN2026
RV492 TLN2026
RV493 TLN2026
RV494 TLN2026
RV495 TLN2026
RV496 TLN2026
RV497 TLN2026
RV498 TLN2026
RV499 TLN2026
RV500 TLN2026
RV501 TLN2026
RV502 TLN2026
RV503 TLN2026
RV504 TLN2026
RV505 TLN2026
RV506 TLN2026
RV507 TLN2026
RV508 TLN2026
RV509 TLN2026
RV510 TLN2026
RV511 TLN2026
RV512 TLN2026
RV513 TLN2026
RV514 TLN2026
RV515 TLN2026
RV516 TLN2026
RV517 TLN2026
RV518 TLN2026
RV519 TLN2026
RV520 TLN2026
RV521 TLN2026
RV522 TLN2026
RV523 TLN2026
RV524 TLN2026
RV525 TLN2026
RV526 TLN2026
RV527 TLN2026
RV528 TLN2026
RV529 TLN2026
RV530 TLN2026
RV531 TLN2026
RV532 TLN2026
RV533 TLN2026
RV534 TLN2026
RV535 TLN2026
RV536 TLN2026
RV537 TLN2026
RV538 TLN2026
RV539 TLN2026
RV540 TLN2026
RV541 TLN2026
RV542 TLN2026
RV543 TLN2026
RV544 TLN2026
RV545 TLN2026
RV546 TLN2026
RV547 TLN2026
RV548 TLN2026
RV549 TLN2026
RV550 TLN2026
RV551 TLN2026
RV552 TLN2026
RV553 TLN2026
RV554 TLN2026
RV555 TLN2026
RV556 TLN2026
RV557 TLN2026
RV558 TLN2026
RV559 TLN2026
RV560 TLN2026
RV561 TLN2026
RV562 TLN2026
RV563 TLN2026
RV564 TLN2026
RV565 TLN2026
RV566 TLN2026
RV567 TLN2026
RV568 TLN2026
RV569 TLN2026
RV570 TLN2026
RV571 TLN2026
RV572 TLN2026
RV573 TLN2026
RV574 TLN2026
RV575 TLN2026
RV576 TLN2026
RV577 TLN2026
RV578 TLN2026
RV579 TLN2026
RV580 TLN2026
RV581 TLN2026
RV582 TLN2026
RV583 TLN2026
RV584 TLN2026
RV585 TLN2026
RV586 TLN2026
RV587 TLN2026
RV588 TLN2026
RV589 TLN2026
RV590 TLN2026
RV591 TLN2026
RV592 TLN2026
RV593 TLN2026
RV594 TLN2026
RV595 TLN2026
RV596 TLN2026
RV597 TLN2026
RV598 TLN2026
RV599 TLN2026
RV600 TLN2026
RV601 TLN2026
RV602 TLN2026
RV603 TLN2026
RV604 TLN2026
RV605 TLN2026
RV606 TLN2026
RV607 TLN2026
RV608 TLN2026
RV609 TLN2026
RV610 TLN2026
RV611 TLN2026
RV612 TLN2026
RV613 TLN2026
RV614 TLN2026
RV615 TLN2026
RV616 TLN2026
RV617 TLN2026
RV618 TLN2026
RV619 TLN2026
RV620 TLN2026
RV621 TLN2026
RV622 TLN2026
RV623 TLN2026
RV624 TLN2026
RV625 TLN2026
RV626 TLN2026
RV627 TLN2026
RV628 TLN2026
RV629 TLN2026
RV630 TLN2026
RV631 TLN2026
RV632 TLN2026
RV633 TLN2026
RV634 TLN2026
RV635 TLN2026
RV636 TLN2026
RV637 TLN2026
RV638 TLN2026
RV639 TLN2026
RV640 TLN2026
RV641 TLN2026
RV642 TLN2026
RV643 TLN2026
RV644 TLN2026
RV645 TLN2026
RV646 TLN2026
RV647 TLN2026
RV648 TLN2026
RV649 TLN2026
RV650 TLN2026
RV651 TLN2026
RV652 TLN2026
RV653 TLN2026
RV654 TLN2026
RV655 TLN2026
RV656 TLN2026
RV657 TLN2026
RV658 TLN2026
RV659 TLN2026
RV660 TLN2026
RV661 TLN2026
RV662 TLN2026
RV663 TLN2026
RV664 TLN2026
RV665 TLN2026
RV666 TLN2026
RV667 TLN2026
RV668 TLN2026
RV669 TLN2026
RV670 TLN2026
RV671 TLN2026
RV672 TLN2026
RV673 TLN2026
RV674 TLN2026
RV675 TLN2026
RV676 TLN2026
RV677 TLN2026
RV678 TLN2026
RV679 TLN2026
RV680 TLN2026
RV681 TLN2026
RV682 TLN2026
RV683 TLN2026
RV684 TLN2026
RV685 TLN2026
RV686 TLN2026
RV687 TLN2026
RV688 TLN2026
RV689 TLN2026
RV690 TLN2026
RV691 TLN2026
RV692 TLN2026
RV693 TLN2026
RV694 TLN2026
RV695 TLN2026
RV696 TLN2026
RV697 TLN2026
RV698 TLN2026
RV699 TLN2026
RV700 TLN2026
RV701 TLN2026
RV702 TLN2026
RV703 TLN2026
RV704 TLN2026
RV705 TLN2026
RV706 TLN2026
RV707 TLN2026
RV708 TLN2026
RV709 TLN2026
RV710 TLN2026
RV711 TLN2026
RV712 TLN2026
RV713 TLN2026
RV714 TLN2026
RV715 TLN2026
RV716 TLN2026
RV717 TLN2026
RV718 TLN2026
RV719 TLN2026
RV720 TLN2026
RV721 TLN2026
RV722 TLN2026
RV723 TLN2026
RV724 TLN2026
RV725 TLN2026
RV726 TLN2026
RV727 TLN2026
RV728 TLN2026
RV729 TLN2026
RV730 TLN2026
RV731 TLN2026
RV732 TLN2026
RV733 TLN2026
RV734 TLN2026
RV735 TLN2026
RV736 TLN2026
RV737 TLN2026
RV738 TLN2026
RV739 TLN2026
RV740 TLN2026
RV741 TLN2026
RV742 TLN2026
RV743 TLN2026
RV744 TLN2026
RV745 TLN2026
RV746 TLN2026
RV747 TLN2026
RV748 TLN2026
RV749 TLN2026
RV750 TLN2026
RV751 TLN2026
RV752 TLN2026
RV753 TLN2026
RV754 TLN2026
RV755 TLN2026
RV756 TLN2026
RV757 TLN2026
RV758 TLN2026
RV759 TLN2026
RV760 TLN2026
RV761 TLN2026
RV762 TLN2026
RV763 TLN2026
RV764 TLN2026
RV765 TLN2026
RV766 TLN2026
RV767 TLN2026
RV768 TLN2026
RV769 TLN2026
RV770 TLN2026
RV771 TLN2026
RV772 TLN2026
RV773 TLN2026
RV774 TLN2026
RV775 TLN2026
RV776 TLN2026
RV777 TLN2026
RV778 TLN2026
RV779 TLN2026
RV780 TLN2026
RV781 TLN2026
RV782 TLN2026
RV783 TLN2026
RV784 TLN2026
RV785 TLN2026
RV786 TLN2026
RV787 TLN2026
RV788 TLN2026
RV789 TLN2026
RV790 TLN2026
RV791 TLN2026
RV792 TLN2026
RV793 TLN2026
RV794 TLN2026
RV795 TLN2026
RV796 TLN2026
RV797 TLN2026
RV798 TLN2026
RV799 TLN2026
RV800 TLN2026
RV801 TLN2026
RV802 TLN2026
RV803 TLN2026
RV804 TLN2026
RV805 TLN2026
RV806 TLN2026
RV807 TLN2026
RV808 TLN2026
RV809 TLN2026
RV810 TLN2026
RV811 TLN2026
RV812 TLN2026
RV813 TLN2026
RV814 TLN2026
RV815 TLN2026
RV816 TLN2026
RV817 TLN2026
RV818 TLN2026
RV819 TLN2026
RV820 TLN2026
RV821 TLN2026
RV822 TLN2026
RV823 TLN2026
RV824 TLN2026
RV825 TLN2026
RV826 TLN2026
RV827 TLN2026
RV828 TLN2026
RV829 TLN2026
RV830 TLN2026
RV831 TLN2026
RV832 TLN2026
RV833 TLN2026
RV834 TLN2026
RV835 TLN2026
RV836 TLN2026
RV837 TLN2026
RV838 TLN2026
RV839 TLN2026
RV840 TLN2026
RV841 TLN2026
RV842 TLN2026
RV843 TLN2026
RV844 TLN2026
RV845 TLN2026
RV846 TLN2026
RV847 TLN2026
RV848 TLN2026
RV849 TLN2026
RV850 TLN2026
RV851 TLN2026
RV852 TLN2026
RV853 TLN2026
RV854 TLN2026
RV855 TLN2026
RV856 TLN2026
RV857 TLN2026
RV858 TLN2026
RV859 TLN2026
RV860 TLN2026
RV861 TLN2026
RV862 TLN2026
RV863 TLN2026
RV864 TLN2026
RV865 TLN2026
RV866 TLN2026
RV867 TLN2026
RV868 TLN2026
RV869 TLN2026
RV870 TLN2026
RV871 TLN2026
RV872 TLN2026
RV873 TLN2026
RV874 TLN2026
RV875 TLN2026
RV876 TLN2026
RV877 TLN2026
RV878 TLN2026
RV879 TLN2026
RV880 TLN2026
RV881 TLN2026
RV882 TLN2026
RV883 TLN2026
RV884 TLN2026
RV885 TLN2026
RV886 TLN2026
RV887 TLN2026
RV888 TLN2026
RV889 TLN2026
RV890 TLN2026
RV891 TLN2026
RV892 TLN2026
RV893 TLN2026
RV894 TLN2026
RV895 TLN2026
RV896 TLN2026
RV897 TLN2026
RV898 TLN2026
RV899 TLN2026
RV900 TLN2026
RV901 TLN2026
RV902 TLN2026
RV903 TLN2026
RV904 TLN2026
RV905 TLN2026
RV906 TLN2026
RV907 TLN2026
RV908 TLN2026
RV909 TLN2026
RV910 TLN2026
RV911 TLN2026
RV912 TLN2026
RV913 TLN2026
RV914 TLN2026
RV915 TLN2026
RV916 TLN2026
RV917 TLN2026
RV918 TLN2026
RV919 TLN2026
RV920 TLN2026
RV921 TLN2026
RV922 TLN2026
RV923 TLN2026
RV924 TLN2026
RV925 TLN2026
RV926 TLN2026
RV927 TLN2026
RV928 TLN2026
RV929 TLN2026
RV930 TLN2026
RV931 TLN2026
RV932 TLN2026
RV933 TLN2026
RV934 TLN2026
RV935 TLN2026
RV936 TLN2026
RV937 TLN2026
RV938 TLN2026
RV939 TLN2026
RV940 TLN2026
RV941 TLN2026
RV942 TLN2026
RV943 TLN2026
RV944 TLN2026
RV945 TLN2026
RV946 TLN2026
RV947 TLN2026
RV948 TLN2026
RV949 TLN2026
RV950 TLN2026
RV951 TLN2026
RV952 TLN2026
RV953 TLN2026
RV954 TLN2026
RV955 TLN2026
RV956 TLN2026
RV957 TLN2026
RV958 TLN2026
RV959 TLN2026
RV960 TLN2026
RV961 TLN2026
RV962 TLN2026
RV963 TLN2026
RV964 TLN2026
RV965 TLN2026
RV966 TLN2026
RV967 TLN2026
RV968 TLN2026
RV969 TLN2026
RV970 TLN2026
RV971 TLN2026
RV972 TLN2026
RV973 TLN2026
RV974 TLN2026
RV975 TLN2026
RV976 TLN2026
RV977 TLN2026
RV978 TLN2026
RV979 TLN2026
RV980 TLN2026
RV981 TLN2026
RV982 TLN2026
RV983 TLN2026
RV984 TLN2026
RV985 TLN2026
RV986 TLN2026
RV987 TLN2026
RV988 TLN2026
RV989 TLN2026
RV990 TLN2026
RV991 TLN2026
RV992 TLN2026
RV993 TLN2026
RV994 TLN2026
RV995 TLN2026
RV996 TLN2026
RV997 TLN2026
RV998 TLN2026
RV999 TLN2026
RV1000 TLN2026

PIN	QV01	
CE	15	16
TV	H	H(L)
IDE01	H	L
IDE02	L	L
IDE03	L	H

DEFLECTION YOKE
VERT COIL
HOR. COIL
PS70
HS70
HS111

VERT. UP/DN SW.
HEIGHT
FOCUS
SCREEN
SERVICE SW.
Raster Receive
H.Line

2100RFT

SCHEMATIC DIAGRAM (2/2)

IMPORTANT SAFETY NOTICE

Component marked with the International Hazard Symbol must, if changed, be replaced by an approved type and must be mounted as the original. This will ensure that the safety standards adhered to during manufacture will be maintained following any servicing procedure.

OBSERVATION OF VOLTAGES AND WAVEFORMS

1. Voltage readings were obtained using a high impedance digital voltmeter.
2. (–) or ground lead of instruments should be connected to the ground marked (⊥) in the shematic on checking Non-isolated circuit surrounded by mark but should be connected to the points marked (⏚) on checking isolated circuit.
3. The voltage readings may vary as much as ±20%.
4. Check that the Tuning, A.F.C., Brightness, Contrast and Colour controls are adjusted for the best picture, making sure that the Contrast/Brightness and Colour controls are set near to their mid-positions.
5. The waveforms were taken using a standard colour bar signal and were observed using a wide band oscilloscope via a low capacity probe.

NOTES:

1. This circuit diagram is subject to change without notice.

EXPRESSION

VALUE OF RESISTOR, CAPACITOR and INDUCTOR

1. Resistance is shown in ohm, k=1,000, M=1,000,000.
2. Unless otherwise noted in schematic, all capacitor values less than 1 are expressed in μF and the values more than 1 in pF.
3. Unless otherwise noted in schematic, all inductor values more than 1 are expressed in μH, and the values less than 1 in H.

GROUNDING SYMBOL

1. ⊥: Non isolated ground, ⏚ : Isolated ground.

RESISTORS

Prefixed to values:

TYPE
Carbon Comp
Oxide Metal F
Ins. Carbon Fi
Wire Wounc
Cement covered
Fusible Res

U101A PIF BOARD PB0014-1

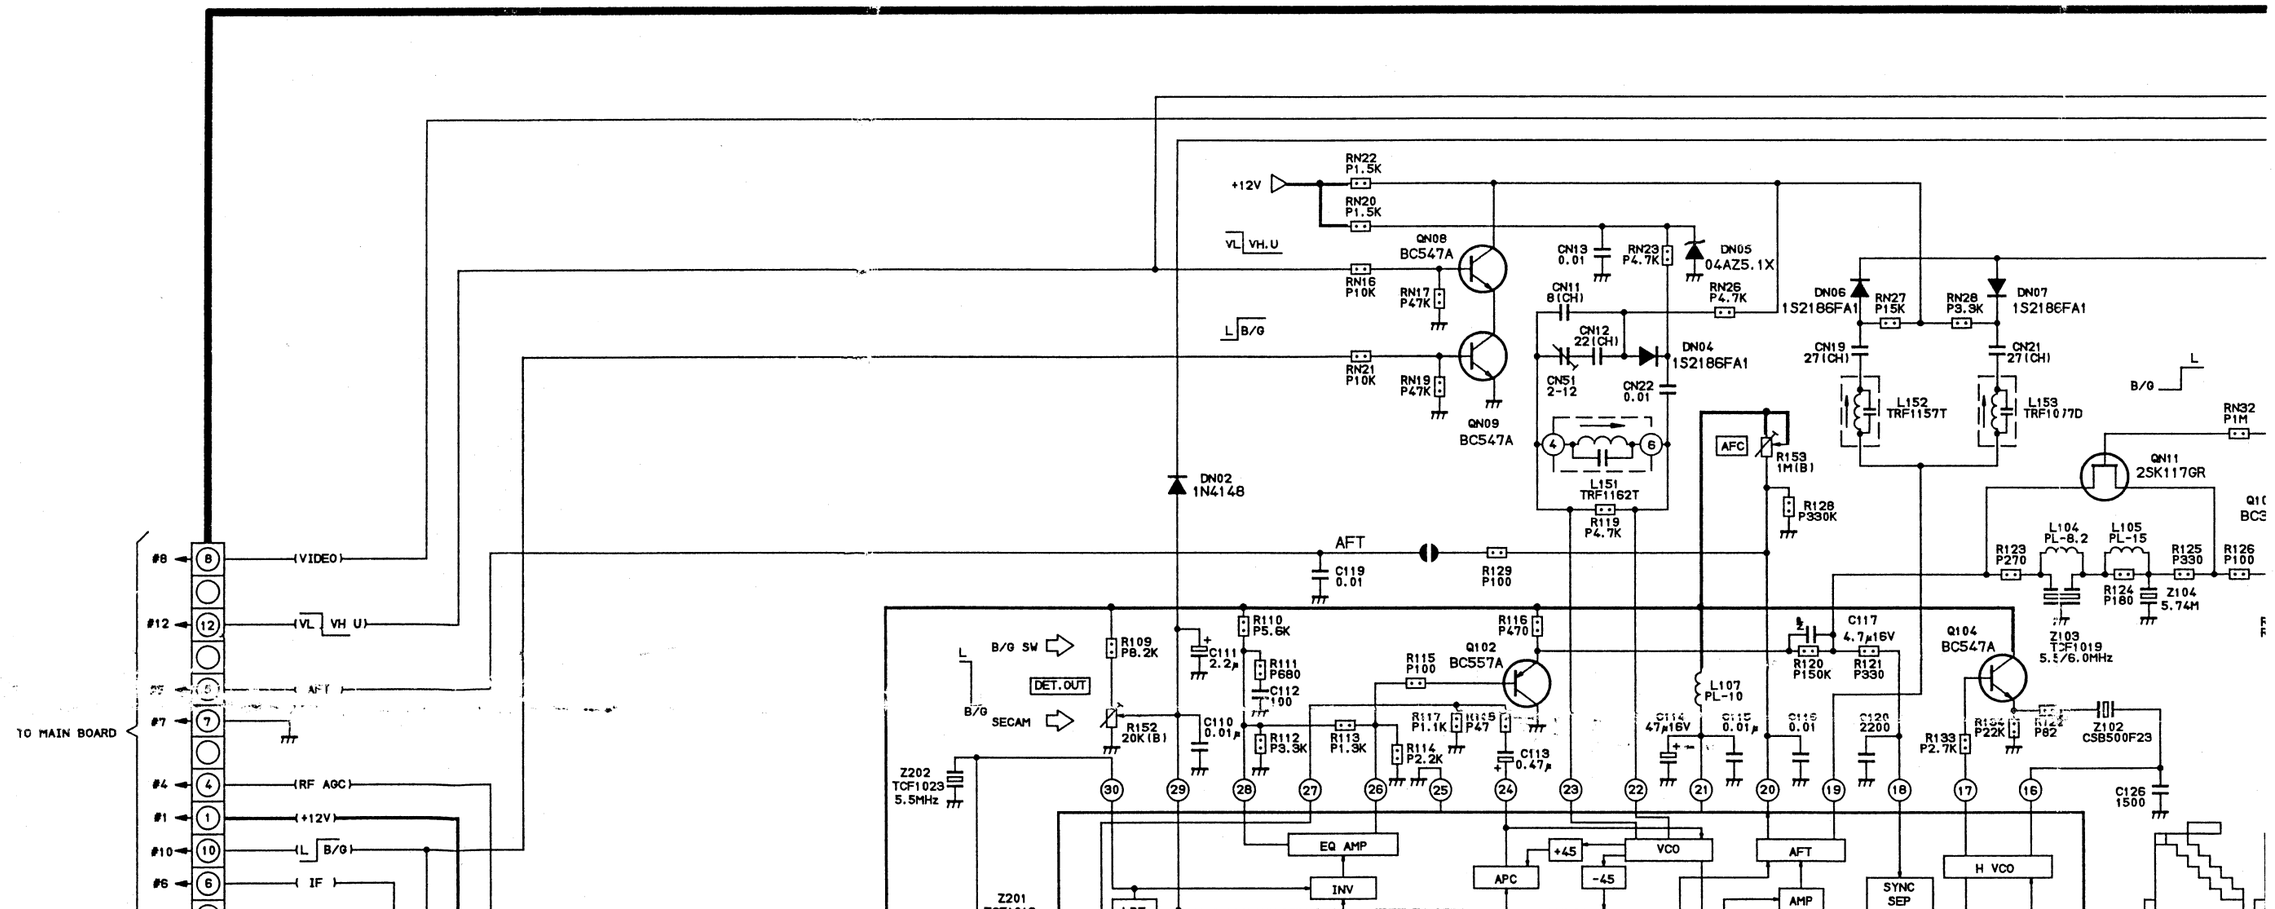

TO MAIN BOARD

P101
#8 (8) (VIDEO)
#12 (12) (VL) (VH) (U)
(5) (AFT)
#7 (7)
#4 (4) (RF AGC)
#1 (1) (+12V)
#10 (10) (L) (B/G)
#6 (6) (IF)
#9 (9) (SIF)

DN02 1N4148
QN09 BC547A
L151 TRF1162T
R119 P4.7K
AFC
R153 1M(B)
R128 P330K
QN11 2SK117GR
L104 PL-8.2
L105 PL-15
R123 P270
R125 P330
R126 P100
R124 P180
Z104 5.74M
Z109 TCF1019 5.5/6.0MHz
AFT
C119 0.01
R129 P100
R116 P470
C117 4.7µ16V
Q104 BC547A
R120 P150K
R121 P330
L107 PL-10
B/G SW
L
B/G
DET.OUT
SECAM
R109 P8.2K
C111 2.2µ
R110 P5.6K
R111 P680
C112 100
R152 20K(B)
C110 0.01µ
R112 P3.3K
R113 P1.9K
R114 P2.2K
R115 P100
Q102 BC557A
R117 P1.1K
R155 P47
C113 0.47µ
C114 47µ16V
C115 0.01µ
C116 0.01
C120 2200
R133 P2.7K
R134 P22K
R142 P82
Z102 CSB500F23
Z202 TCF1023 5.5MHz
C126 1500
2.0Vp-p
Q101 µPC1820CA
EQ AMP
INV
LPF
VIDEO AMP
VIDEO DET
APC
+45
-45
VCO
AFT
AMP
SYNC SEP
H VCO
HORIZONTAL COUNT DOWN
Z201 TCF1013 6.5MHz
L103 PL-8.2
IF AGC
RF AGC
LOCK DET
2ND IF AMP
1ST IF AMP
SIF DET
MUTE DET
AFC
R201 P240
C103 100
Q406 2SD1378Q
R423 R220
C425 100µ16V
C424 47µ
D409 04AZ10Y
C423 0.01
R108 P1K
R107 P10K
C109 0.01
C107 M0.047µ
C106 2.2µ
C108 0.47µ35V (TA)
C105 0.01µ
R105 P15K
R104 P3.3K
R103 P2.2K
R151 5K(B)
RF AGC
C104 22µ
R102 P120K
C101 1000
R101 P2.2K
C102 1000
L102 TRF1149D
C601 1000
C118 0.01
CN09 0.01
C123 0.47µ
R132 P680K
NP
C121 1µ
C122 M0.015µ
RN60 P10K
QN16 BC547A
RN61 P10K
RN49 P1.5K
R106 P100K
C125 0.01
L101 PL-10
C124 100µ16V
R130 P51K
R131 P75K
12V
R167 R100
C127 470µ16V
C164 0.01
R163 P4.7K
Q163 2SC388ATM
L161 TRF9221
Z101 F1038D
R165 P5.6K
C163 1000
C162 1000
R162 P68
Q161 2SC388ATM
R164 P1.2K
R175 P120
C165 1000
R166 56
R136 P68
L163 TRF1143D
C161 0.001
R135 P150
L160 PL-0.22
RN44 P1.5K
C167 561(CH)
DN11 1S2186FA-1
RN46 P10K
QN15 BC547A
RN45 P47K
C168 0.01
DN12 1S2186 FA-1
C170 0.01
R137 P10K
R138 P10K
R608 P100

1 are expressed in

1 are expressed in

RESISTORS

Prefixed to values:

TYPE	MARK
Carbon Comp.	S
Oxide Metal Film	R
Ins. Carbon Film	P
Wire Wound	W
Cement covered W.W.	NO MARK
Fusible Res.	FR

Suffixes to values:

TOLERANCE	MARK
±1%	(F)
±2%	(G)

Suffixes to VR values:

LAW	MARK
Linear	(B)
'C' Curve Characteristic	(C)

Rating Markings:

WATTAGE	MARK
1/6W	
1/4W	
1/2W	
1W	1
2W	2

WATTAGE	MARK
3W	3
5W	5
10W	10
15W	15
20W	20
25W	25

CAPACITORS

Rating Markings:

Type	Mark
Ceramic Disc 50V Only	
Electrolytic	
Electrolytic Non-Polar	
Variable Capacitor	
Other	

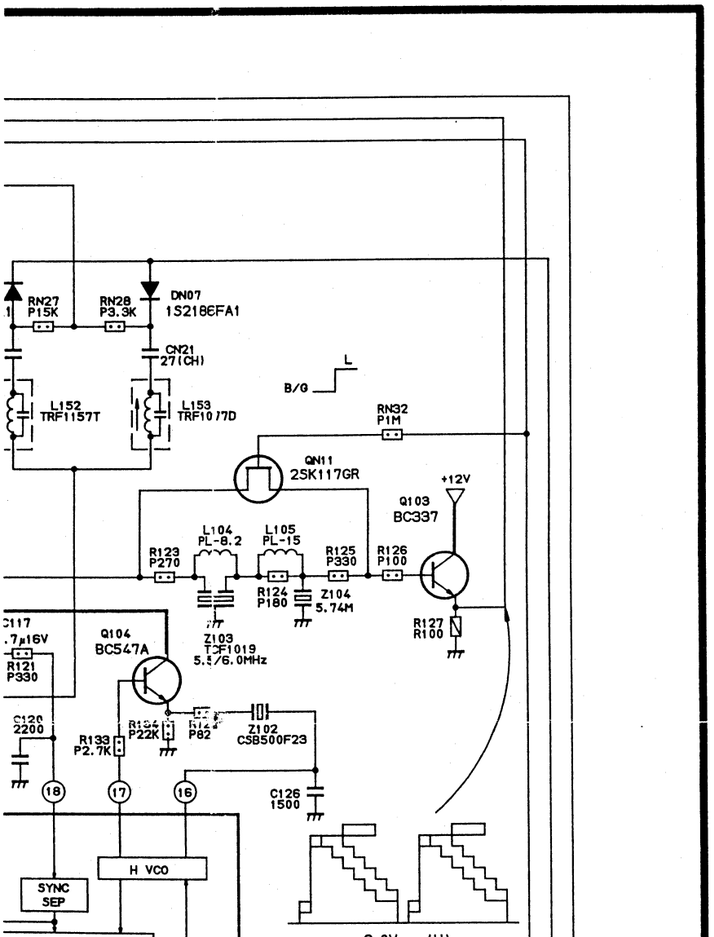

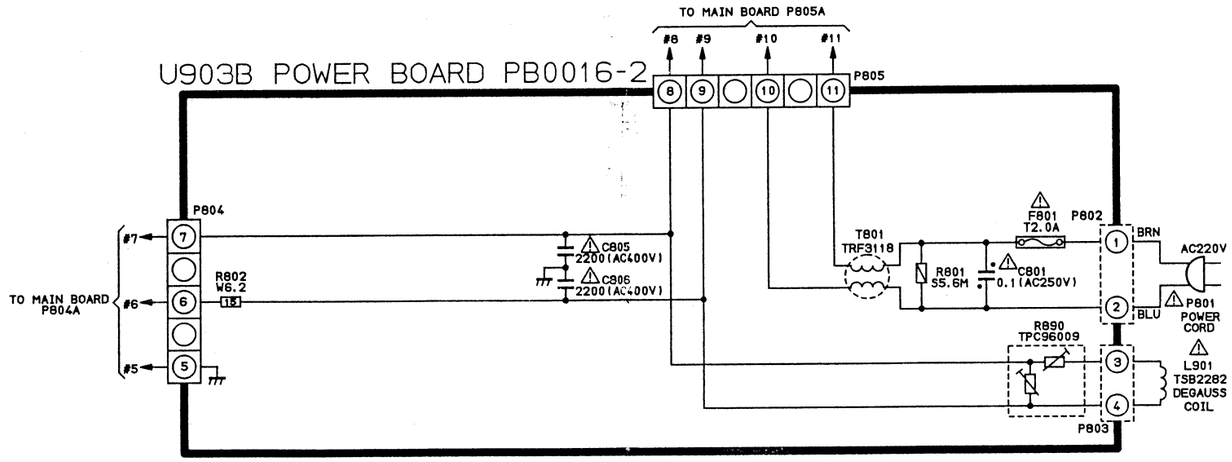

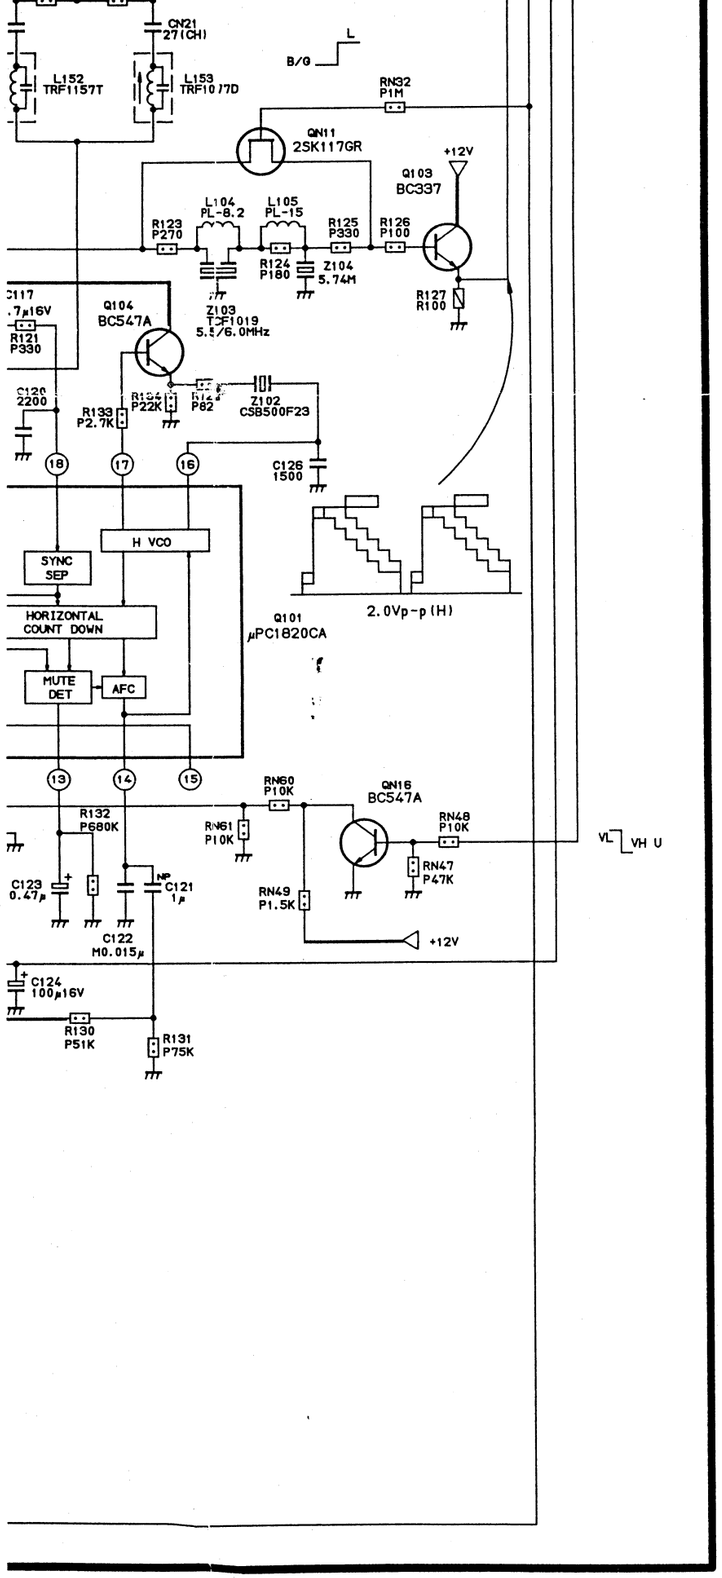

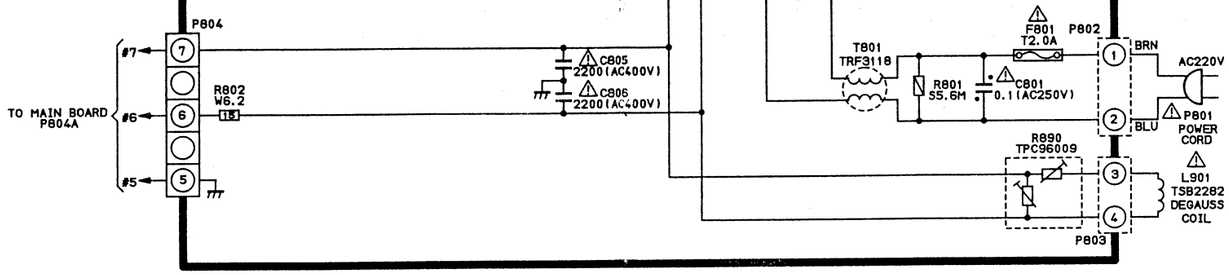

U101B SIF BOARD PB0014-2